



Quote No	Quote Date	Page
20170120	2/13/2017	1

NJPA Contract No: 07013-PII

Bill To
Village of Oak Park
201 South Blvd.
Oak Park, IL 60302

Ship to
Village of Oak Park
201 South Blvd.
Oak Park, IL 60302

Customer No	Slpsn	Payment terms				
1523	19	Net 30				
Loc	PPD/COL	Ship via	Ship Date			
03		DRIVE AWAY	A.S.A.P.			
Qty Ordered	UOM	Item No	Unit price	Disc	Extended price	
1.00	EA	LOADER AS CONFIGURED BELOW PAINT PI FOREST GREEN	49,871.00	2.00	48,873.58	
Feature/Kit Components- LOADER						
1.00	EA	0.DL3 MODEL DL3 BASE LOADER HIGH CAPACITY DEBRIS LOADER	1.00		46,149.00	
1.00	EA	02.41RT REFLECTIVE TAPE OUTRIGGERS	1.00		98.00	
1.00	EA	03.11SAI HEAVY DUTY SWING MOTOR	1.00		0.00	
1.00	EA	01.20STM STATIONARY TOP MOUNT CONTROLS	1.00		0.00	
1.00	EA	07.14 BB BUCKET BIG BITE BUCKET 2 CYLINDER	1.00		1,390.00	
1.00	EA	10.04 BUWL BOOM-UP WARNING LIGHT/AUDIBLE ALARM	1.00		0.00	
1.00	EA	10.16 HDHI HDHI OUTRIGGER STROBE	1.00		483.00	
1.00	EA	10.03INTERLOCK OUTRIGGER INTERLOCK TO PREVENT TRUCK MOVEMENT	1.00		1,135.00	
1.00	EA	12.36 HD HD CONTROL BOX THROTTLE ENGINE KILL & HORN	1.00		0.00	
1.00	EA	11.02 LOADER SINGLE COLOR (ENAMEL) AS DEFINED BELOW	1.00		0.00	
1.00	EA	10.99 SA-901 BACK-UP ALARM SA-901	1.00		168.00	
1.00	EA	12.06 5LB FIRE EXTINGUISHER 5LB	1.00		156.00	
1.00	ST	10.97 WL WORK LIGHTS - (SET OF 2) (1 EACH SIDE OF BOOM)	1.00		292.00	
1.00	EA	8.0 DUMP BODY AS CONFIGURED BELOW	25,073.00	2.00	24,571.54	
Feature/Kit Components- 8.0 DUMP BODY						
1.00	EA	8.28 1828-HDX MODEL HDX-1828 HARDOX BODY 1/8" SIDES, 3/16" FLOOR	1.00		21,707.00	
1.00	EA	8.40 S-BD STANDARD BARN DOORS FOR BODY	1.00		0.00	
1.00	EA	8.47 WL-BW WIRE LOOM FOR BODY WIRING	1.00		0.00	



Quote No	Quote Date	Page
20170120	2/13/2017	2

NJPA Contract No: 07013-PII

Bill To
Village of Oak Park
201 South Blvd.
Oak Park, IL 60302

Ship to
Village of Oak Park
201 South Blvd.
Oak Park, IL 60302

Customer No 1523	Slpsn 19	Payment terms Net 30
Loc 03	PPD/COL	Ship via DRIVE AWAY
		Ship Date A.S.A.P.

Qty Ordered	UOM	Item No	Unit price	Disc	Extended price
1.00	EA	10.09 LED LED TYPE BODY LIGHTS, 15 EA.	1.00		0.00
1.00	EA	10.10 LED FLASH AMBER LED FLASHERS IN REAR CORNER POST	1.00		324.00
1.00	EA	8.77ANSI ANSI Z245 PACKAGE	1.00		0.00
1.00	EA	8.76 RCMTL REAR CAMERA MOUNTED IN REAR MARKER LIGHT-TV-550	1.00		1,547.00
1.00	EA	11.02B BODY COLOR: BLACK	1.00		0.00
1.00	EA	11.01 UTB UNDERCOAT TRASH BODY (BOTTOM)	1.00		613.00
1.00	EA	8.44 SMF STEEL MUD FLAPS IN FRONT OF WHEELS	1.00		298.00
1.00	ST	10.98 WLCB WORK LIGHTS - (SET OF 2) (CURBSIDE UNDER BODY)	1.00		292.00
1.00	ST	10.98 WLSB WORK LIGHTS - (SET OF 2) (STREETSIDE UNDER BODY)	1.00		292.00
1.00	EA	CHASSIS-OTHER 2017 FORD F750 33K GVW	71,709.00	2.00	70,274.82
1.00	EA	NI-EQP MISC NON-CONTRACT ITEM TRADE-IN FOR 1998 GMC	-15,000.00		-15,000.00
1.00	EA	NI-EQP MISC NON-CONTRACT ITEM FRAME MOUNTED TOOLBOX (x2) TWO FRAME MOUNTED TOOLBOXES TO BE BE MOUNTED TO FRAME, ONE TO BE 18"X18"X60" AND ONE TO BE 18"X18"X24". BOTH TO BE SHINY, SMOOTH ALUMINUM.	1,453.00	2.00	1,423.94

ERIC LESAGE / 815 370 3549

SubTotal	130,143.88
Delivery	2,682.00
Tax	0.00
Total Quote	132,825.88

Signature

Date



Standard Equipment & Specs

Dimensions

Exterior length: 246.0" * Exterior width: 96.7" * Exterior height: 94.3" * Wheelbase: 158.0" * Front track: 81.8" * Rear track: 72.6" * Front legroom: 41.4" * Front headroom: 40.7" * Front hiproom: 67.6" * Front shoulder room: 68.0"

Powertrain

270hp 6.7L OHV 32 valve intercooled turbo V-8 engine with diesel direct injection * Recommended fuel : diesel * federal * 6 speed automatic transmission with overdrive * Rear-wheel drive * Fuel Economy Cty: N/A * Fuel Economy Highway: N/A * 50.0 gal. rectangular Left front fuel tank * Fuel/water separator * Standard rear differential * Right mounted horizontal muffler * Right mounted horizontal tailpipe

Suspension/Handling

Front non-independent leaf spring suspension * Rear rigid axle leaf spring suspension * Hydraulic power-assist re-circulating ball Steering * Front and rear 22.5 x 7.5 wheels * 11.0R22.5 AS front and rear tires * Dual rear wheels * Rubber auxiliary rear springs

Body Exterior

2 doors * Driver and passenger folding door mirrors * Black door mirrors * Black bumpers * Side steps * Clearcoat paint * Straight front bumper ends * Hood mounted grille * Front and rear 22.5 x 7.5 white steel wheels with 10 wheel studs

Convenience

Manual air conditioning * Cruise control with steering wheel controls * Manual front windows * Manual door locks * Manual tilt steering wheel * Front cupholders * Passenger visor mirror * Dual electric horn * Automatic gearshift steering column lever * Driver and passenger door bins

Seats and Trim

Seating capacity of 2 * Fixed driver seat * Fixed passenger seat * Bucket driver seat, Bucket passenger seat * Driver seat folding back, passenger seat fixed back * Low back seats * Driver seat with 4 way direction control, passenger seat with 2 way direction control * Manual fore/aft seats

Entertainment Features

AM/FM stereo radio * Auxiliary audio input * 2 speakers * Fixed antenna

Lighting, Visibility and Instrumentation

Halogen aero-composite headlights * Variable intermittent front windshield wipers * Light tinted windows * Front reading lights * Tachometer * Oil pressure gauge * Trip computer * Trip odometer * RNDM

Safety and Security

4-wheel ABS brakes * Hydraulic disc brakes * Manual door locks

Dimensions

General Weights

Curb	10040 lbs.	Front curb weight	6294 lbs.
Rear curb weight	3746 lbs.	Front axle capacity	10000 lbs.
Rear axle capacity	21000 lbs.	Front spring rating	10000 lbs.
Rear spring rating	21000 lbs.	Front tire/wheel capacity	12350 lbs.
Rear tire/wheel capacity	23360 lbs.	Front GAWR	12000 lbs.
Rear GAWR	21000 lbs.	GVWR	33000 lbs.
GCWR	50000 lbs.		

Fuel Tank type

Capacity 50 gal.

Front Frame

Prices and content availability as shown are subject to change and should be treated as estimates only. Actual base vehicle, package and option pricing may vary from this estimate because of special local pricing, availability or pricing adjustments not reflected in the dealer's computer system. See salesperson for the most current information. |



Standard Equipment & Specs (cont'd)

Height loaded	35 "	Height unloaded	37 "
<i>Rear Frame</i>			
Height loaded	36 "	Height unloaded	38 "

Powertrain

Engine Type

Block material	Iron	Cylinders	V-8
Head material	Aluminum	Ignition	Compression
Injection	Diesel direct injection	Liters	6.7L
Orientation	Longitudinal	Recommended fuel	Diesel
Valves per cylinder	4	Valvetrain	OHV
Forced induction	Intercooled turbo		

Engine Spec

Bore	3.90"	Compression ratio	16.2:1
Displacement	406 cu.in.	Stroke	4.25"

Engine Power

Output	270 HP @ 2,400 RPM	Torque	675 ft.-lb @ 1,600 RPM
Governed RPM	3200		

Alternator

Type	HD	Amps	200
------	----	------	-----

Battery

Cold cranking amps	1500	Location	Forward right
Step	Yes	Type	Dual

Transmission

Electronic control	Yes	Lock-up	Yes
Overdrive	Yes	Speed	6
Type	Automatic		

Transmission Gear Ratios

1st	3.974	2nd	2.318
3rd	1.516	4th	1.149
5th	0.858	6th	0.674
Reverse Gear ratios	3.128		

Transmission Torque Converter

Stall ratio	1.85
-------------	------

Transmission Extras

Driver selectable mode	Yes	Sequential shift control	Yes
Oil cooler	Regular duty		

Drive Type

Type	Rear-wheel
------	------------

Exhaust

Material	Aluminized steel	System type	Single
----------	------------------	-------------	--------

Emissions

CARB	Federal
------	---------

Engine Retarder

Prices and content availability as shown are subject to change and should be treated as estimates only. Actual base vehicle, package and option pricing may vary from this estimate because of special local pricing, availability or pricing adjustments not reflected in the dealer's computer system. See salesperson for the most current information.



Standard Equipment & Specs (cont'd)

Type	Yes		
Driveability			
<i>Brakes</i>			
ABS	4-wheel	ABS channels	4
Type	Hydraulic disc	Vented discs	Front and rear
<i>Suspension Control</i>			
Ride	Regular		
<i>Front Suspension</i>			
Independence	Non-independent	Type	Leaf
<i>Front Spring</i>			
Type	Tapered leaf	Grade	Regular
<i>Front Shocks</i>			
Type	Regular		
<i>Rear Suspension</i>			
Independence	Rigid axle	Type	Leaf
<i>Rear Spring</i>			
Type	Multi-leaf	Grade	Regular
Auxiliary	Rubber		
<i>Steering</i>			
Activation	Hydraulic power-assist	Type	Re-circulating ball
<i>Steering Specs</i>			
# of wheels	2		
Exterior			
<i>Front Wheels</i>			
Diameter	22.5"	Width	7.50"
<i>Rear Wheels</i>			
Diameter	22.5"	Width	7.50"
Dual	Yes		
<i>Front Tires</i>			
Aspect	82	Diameter	22.5"
Sidewalls	BSW	Tread	AS
Width	11.0"	LT load rating	G
RPM	496		
<i>Rear Tires</i>			
Aspect	82	Diameter	22.5"
Sidewalls	BSW	Tread	AS
Width	11.0"	LT load rating	G
RPM	496		
<i>Wheels</i>			
Front track	81.8"	Rear track	72.6"
Turning radius (to curb)	22'	Turning radius (to bumper)	23'
Wheelbase	158.0"		

Prices and content availability as shown are subject to change and should be treated as estimates only. Actual base vehicle, package and option pricing may vary from this estimate because of special local pricing, availability or pricing adjustments not reflected in the dealer's computer system. See salesperson for the most current information. |



Standard Equipment & Specs (cont'd)

Body Features

Front splash guards	Yes	Body material	Composite/galvanized steel
Side steps	Yes		

Body Doors

Door count	2
------------	---

Exterior Dimensions

Length	246.0"	Body width	96.7"
Body height	94.3"	Cab to axle	84.0"
Axle to end of frame	49.0"	Frame section modulus	15.1cu.in.
Frame yield strength (psi)	80000.0	Frame rail depth	10.3"
Frame rail width	3.1"	Frame rail thickness	0.4"
Max RBM (in.-lbs.)	1275200.0	Frame rail section	9.5"
Front bumper to Front axle	39.0"	Nominal RBM (in.-lbs.)	1211200.0

Seating

Passenger Capacity

Capacity	2
----------	---

Driver Seat

Type	Bucket	Back	Folding
Back type	Low	Way direction control	4
Fore/aft	Manual		

Passenger Seat

Type	Bucket	Back	Fixed
Back type	Low	Way direction control	2
Fore/aft	Manual		

Front Seat Trim

Material	Vinyl	Back material	Carpet
----------	-------	---------------	--------

Convenience

AC And Heat Type

Air conditioning	Manual
------------------	--------

Audio System

Auxiliary audio input	Yes	Radio	AM/FM stereo
Radio grade	Regular	Seek-scan	Yes

Audio Speakers

Speaker type	Regular	Speakers	2
--------------	---------	----------	---

Audio Antenna

Type	Fixed
------	-------

Cruise Control

Cruise control	With steering wheel controls
----------------	------------------------------

Convenience Features

12V DC power outlet	2	Horn	Dual electric
---------------------	---	------	---------------

Door Lock Activation

Type	Manual
------	--------

Prices and content availability as shown are subject to change and should be treated as estimates only. Actual base vehicle, package and option pricing may vary from this estimate because of special local pricing, availability or pricing adjustments not reflected in the dealer's computer system. See salesperson for the most current information.



Standard Equipment & Specs (cont'd)

Instrumentation Type

Display Analog

Instrumentation Gauges

Tachometer	Yes	Oil pressure	Yes
Engine temperature	Yes	Transmission fluid temp	Yes
Engine hour meter	Yes		

Instrumentation Warnings

Battery	Yes	Lights on	Yes
Key	Yes	Service interval	Yes
Brake fluid	Yes	Transmission fluid temp	Yes

Instrumentation Displays

Clock In-radio display

Instrumentation Feature

Trip computer	Yes	Trip odometer	Yes
Shift indicator	RNDM		

Steering Wheel Type

Material	Urethane	Tilting	Manual
----------	----------	---------	--------

Front Side Windows

Window 1st row activation Manual

Window Features

Tinted Light

Front Windshield

Wiper Variable intermittent

Rear Windshield

Window Fixed

Automatic Gearshift

Location Steering column lever

Interior

Passenger Visor

Mirror Yes

Headliner

Coverage	Full	Material	Cloth
----------	------	----------	-------

Floor Trim

Coverage	Full	Covering	Vinyl/rubber
----------	------	----------	--------------

Trim Feature

Gear shift knob Urethane

Lighting

Dome light type	Delay	Front reading	Yes
Variable IP lighting	Yes		

Floor Console Storage

Type Partial

Prices and content availability as shown are subject to change and should be treated as estimates only. Actual base vehicle, package and option pricing may vary from this estimate because of special local pricing, availability or pricing adjustments not reflected in the dealer's computer system. See salesperson for the most current information.



Roesch Ford
 333 West Grand Avenue, Bensenville, Illinois,
 601063329
 Office: 630-279-6000

2017 F-750 Diesel, Regular Cab
 Regular Cab Base(F7D)
 Price Level: 750 Quote ID: OP7501

Standard Equipment & Specs (cont'd)

Storage

Driver door bin	Yes	Front Beverage holder(s)	Yes
Glove box	Yes	Passenger door bin	Yes
Instrument panel	Bin	Dashboard	Yes

Legroom

Front 41.4"

Headroom

Front 40.7"

Hip Room

Front 67.6"

Shoulder Room

Front 68.0"

Prices and content availability as shown are subject to change and should be treated as estimates only. Actual base vehicle, package and option pricing may vary from this estimate because of special local pricing, availability or pricing adjustments not reflected in the dealer's computer system. See salesperson for the most current information.

Prepared for: Mr. Ken Crowley, City of Oak Park
 By: Mike Berger Date: 02/09/2017



Selected Options

Code	Description	MSRP
Base Vehicle		
F7D	Base Vehicle Price (F7D)	\$68,500.00
Engines		
99C	6.7L Power Stroke V8 Turbo Diesel - 270 HP @ 2400 RPM, 675 lb-ft Torque @ 1600 RPM	STD
	Includes Engine Exhaust Brake and manual regen capability. Torque: 675 ft.lbs. @ 1600 rpm.	
	<i>Governed RPM: 3200. Includes CARB clean idle label - may be removed if un-necessary.</i>	
425	50-State Emissions	N/C
41H	Engine Block Heater, Phillips, 120 Volt/750 Watt	\$60.00
Transmissions		
44G	Ford TorqShift HD 6-Speed Automatic - Double Overdrive, less PTO Provision, less Park Pawl	STD
41A	Transmission Power Take-Off Provision w/LiveDrive Capability	\$895.00
Front Wheels & Tires		
643	Wheels, Front 22.5x8.25 White Powder Coated Steel, 10-Hole	\$30.00
	<i>(285.75MM BC) hub piloted, flanged nut, metric mount, 8.25 DC rims; with steel hubs.</i>	
TFA	Tires, Front Two 275/80R22.5H Hankook AH22 (509 rev/mile)	\$115.00
Rear Wheels & Tires		
663	Wheels, Rear 22.5x8.25 White Powder Coated Steel, 10-Hole	\$50.00
	<i>(285.75MM BC) hub piloted, flanged nut, metric mount, 8.25 DC rims; with steel hubs.</i>	
RFB	Tires, Rear Four 275/80R22.5H Hankook DH15 (509 rev/mile)	\$105.00
Brakes		
67C	Air Brakes - Straight Truck	\$1,770.00
	<i>Meritor Q-Plus with ABS, Bendix Anti-Lock Brake System, 4-channel. Includes 15" x 4" front brakes, dual direct reading air pressure gauges, brake lines color coded nylon, Bendix 13.2 CFM capacity air compressor, instrument panel mounted yellow knob parking brake control valve, automatic slack adjusters front and rear, two rear spring parking air brake chambers mounted on front of rear axle, three drain valves and two air tanks (Reference Body Builders Book for location). Rear brake size and components dependent upon axle selection.</i>	
62D	Air Dryer, Bendix AD/IP w/Heater	\$460.00

Prices and content availability as shown are subject to change and should be treated as estimates only. Actual base vehicle, package and option pricing may vary from this estimate because of special local pricing, availability or pricing adjustments not reflected in the dealer's computer system. See salesperson for the most current information.



Selected Options (cont'd)

Code	Description	MSRP
	<i>Mounted left frame rail.</i>	
Front Axle and Suspension		
43P	12,000 lb. Cap. Non-Driving - Dana E-1202I - I-Beam Type	\$525.00
61D	Taper-Leaf Springs, Parabolic - 12,000 lb. Cap <i>2-leaf, 62" x 3.15".</i>	\$305.00
Rear Axle and Suspension		
475	21,000 lb. Single Reduction - Open - Dana / Spicer 21060S	STD
	<i>NOTE: When specifying an axle ratio, check performance guidelines for startability and gradeability.</i>	
68B	Air Suspension - 21,000 lb. Cap <i>With single air suspension leveling valve. Includes: - Shock Absorbers, Rear - Double Acting</i>	\$610.00
68Z	Air Suspension Dump Valve	\$205.00
961	Shock Absorbers, Rear - Double Acting	Included
X6B	6.17 Axle Ratio	N/C
Wheelbase		
242WB	242" Wheelbase/168" CA/100" AF/381" OAL	\$805.00
Frame		
536	Single Channel - Straight 'C' 14.18 SM, 120,000 PSI <i>1,701,600 RBM. Heat treated alloy steel; 10.125" x 3.580" x 0.312" (257.2mm x 90.9mm x 8.0mm).</i>	\$365.00
Exhaust		
91G	Under Cab, Right Side Outlet, Switchback-Style <i>Single, horizontal muffler, right side, under cab, outside of frame rail with rear discharge.</i>	STD
Fuel Tanks		
65B	Fuel Tank - LH 50 Gallon Rectangular - Aluminum	STD
12	12 Gal. Single Tank Fuel Fill. Mandatory Charge Applied, Based On Tank Selection	\$0.00

Electrical / Alternator / Battery

Prices and content availability as shown are subject to change and should be treated as estimates only. Actual base vehicle, package and option pricing may vary from this estimate because of special local pricing, availability or pricing adjustments not reflected in the dealer's computer system. See salesperson for the most current information.



Selected Options (cont'd)

Code	Description	MSRP
17A	200 Amp Denso SC5 Heavy Duty Alternator <i>Extra heavy duty 12 Volt.</i>	Included
55M	Jump Start Stud - Remote Mounted	\$90.00
63A	Battery - Two 750 CCA, 1500 Total, Includes Steel Battery Box <i>12Volt, Motorcraft.</i>	STD
59C	Body Builder Wiring - At End of Frame, Combined <i>Includes sealed connectors for 2 ground circuits, with combined left/stop, combined right/stop, back up lamps. Also includes 2 additional pass through wires to cab.</i>	\$135.00
Seats		
88G	30/70 Air Ride Driver (External Air Source) & Fixed 2-Passenger Bench - Vinyl	\$395.00
Cab Interior		
600A	Preferred Equipment Package 600A <i>Includes: - Bumper, Front - Black, Full Width - Wheel Seals, Front - Oil lubricated, SKF ScotSeal PlusXL Seals - Wheel Seals, Rear - Oil lubricated, SKF ScotSeal PlusXL Seals - Hydraulic Brake System - Bosch HydroMax Full power with automatic adjustment, 4-channel ABS antilock brake system. Includes 12" x 3" (Bosch) DSSA type rear axle mounted parking brake, Orscheln lever control, right of driver. - Manual Regen Initiation - Driver Interface in Message Center - Engine Exhaust Brake - 200 Amp Denso SC5 Heavy Duty Alternator Extra heavy duty 12 Volt. - Painted Grille - Plastic - Lights - Roof Marker/Clearance - Amber Lenses, 5 Lights - Tow Hooks, Front (2) - Frame-Mounted, Painted Black - Four Body Builder Switches - Mounted in Center Instrument Panel With connector access located in engine compartment. Amperages vary by switch: 10, 15, 25, 25. - Floor Covering - Black Vinyl - Intelligent Oil Life Monitor - Steering Column - Tilt - Steering Wheel - Black PVC w/Integral Cruise Control Switches</i>	N/C
90P	Power Equipment Group <i>Includes power front side windows, power door locks and door trim panel.</i>	\$470.00
21D	SYNC Media System <i>Includes dash mounted USB 2.0 port and redundant steering wheel SYNC controls.</i>	\$395.00
586	Radio, Electronic Premium AM/FM Stereo, Disc <i>With 4 speakers, dash-mounted aux audio input jack and clock and redundant steering wheel audio controls.</i>	\$280.00
Cab Exterior		
54P	Mirrors, Dual - Heated & Motorized Rectangular, XL2020 - 96" Width <i>Integral spot mirror, sail type, solid black finish.</i>	\$245.00

Prices and content availability as shown are subject to change and should be treated as estimates only. Actual base vehicle, package and option pricing may vary from this estimate because of special local pricing, availability or pricing adjustments not reflected in the dealer's computer system. See salesperson for the most current information.



Roesch Ford
333 West Grand Avenue, Bensenville, Illinois,
601063329
Office: 630-279-6000

2017 F-750 Diesel, Regular Cab
Regular Cab Base(F7D)
Price Level: 750 Quote ID: OP7501

Selected Options (cont'd)

Code	Description	MSRP
Miscellaneous		
PAINT	Paint Type - Environmentally Friendly, "3 - Wet System"	STD
Interior Colors		
E_01	Gray	N/C
Primary Colors		
YZ 01	Oxford White	N/C



Prices and content availability as shown are subject to change and should be treated as estimates only. Actual base vehicle, package and option pricing may vary from this estimate because of special local pricing, availability or pricing adjustments not reflected in the dealer's computer system. See salesperson for the most current information.

Prepared for: Mr. Ken Crowley, City of Oak Park
By: Mike Berger Date: 02/09/2017



Performance

Performance predictions in this report represent an estimate of vehicle performance based on standard operating conditions. Variations in customer equipment, load configuration, ambient conditions, and/or operator driving techniques can cause significant variations in vehicle performance. These values are not representative of results that may be shown in actual dynamometer tests. This report should therefore be used as a guide for comparative vehicle performance.

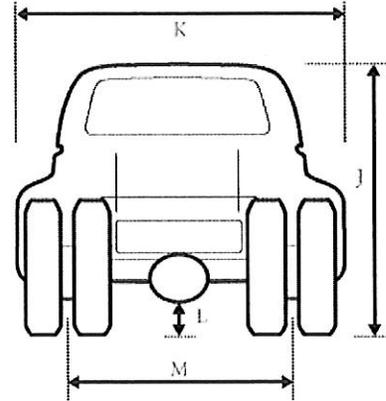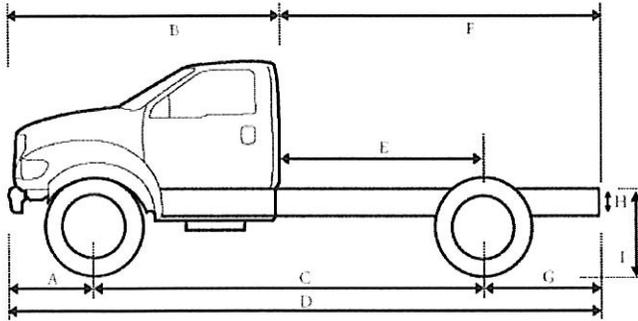

Dimensions

A	Front of Bumper to Front Axle	39.00 in.
B	Front Bumper to Back of Cab (BBC)	113.00 in.
C	Wheelbase (WB)	242.00 in.
D	Overall Length (OAL)	381.00 in.
E	Back of Cab to Rear Axle (CA)	168.00 in.
F	Back of Cab to End of Frame	268.00 in.
G	Rear Axle to End of Frame (AF)	100.00 in.
H	Frame Section Height	10.10 in.
I	Rear Frame Height Unloaded	37.90 in.
I	Rear Frame Height Loaded	37.90 in.
J	Cab Height	94.30 in.
K	Body Width	96.70 in.
L	Maximum Ground Clearance	N/A
L	Minimum Ground Clearance	N/A
M	Front Tread	83.80 in.
M	Rear Tread	72.60 in.


Prices and content availability as shown are subject to change and should be treated as estimates only. Actual base vehicle, package and option pricing may vary from this estimate because of special local pricing, availability or pricing adjustments not reflected in the dealer's computer system. See salesperson for the most current information.



Roesch Ford
 333 West Grand Avenue, Bensenville, Illinois,
 601063329
 Office: 630-279-6000

2017 F-750 Diesel, Regular Cab
 Regular Cab Base (F7D)
 Price Level: 750 Quote ID: OP7501

Performance (cont'd)

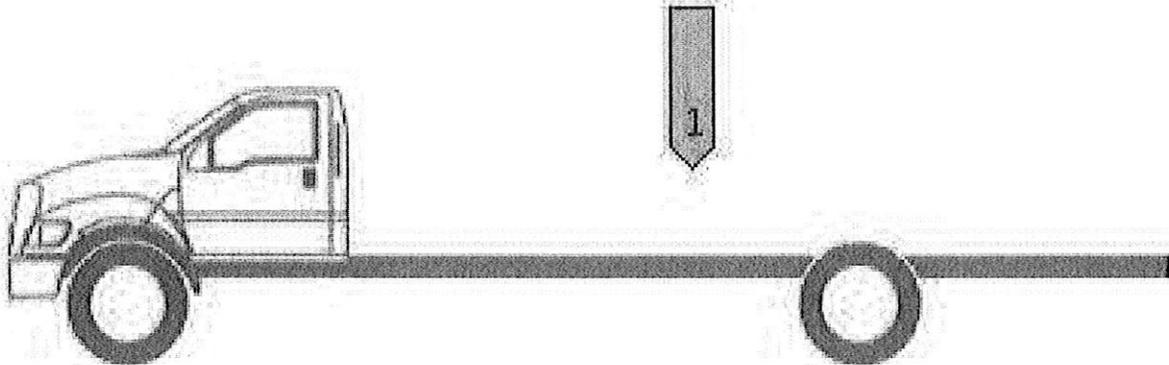

Weight

GVW	Front Axle	Rear Axle	Totals
Chassis	6,675 lbs	3,771 lbs	10,446 lbs
Body	0 lbs	0 lbs	0 lbs
Occupants Weight	200 lbs	100 lbs	300 lbs
1 Max Payload - (Max. Payload)	5,125 lbs	17,129 lbs	22,254 lbs
TOTAL	12,000 lbs	21,000 lbs	33,000 lbs

Ratings	Front Axle	Rear Axle	GVWR
GAWR	12,000 lbs	21,000 lbs	33,000 lbs
Wheels/Tires	14,330 lbs	24,020 lbs	
Suspension	12,000 lbs	21,000 lbs	
Axle	12,000 lbs	21,000 lbs	
Legal Axle Limit	0 lbs	0 lbs	

Prices and content availability as shown are subject to change and should be treated as estimates only. Actual base vehicle, package and option pricing may vary from this estimate because of special local pricing, availability or pricing adjustments not reflected in the dealer's computer system. See salesperson for the most current information.

Prepared for: Mr. Ken Crowley, City of Oak Park
 By: Mike Berger Date: 02/09/2017



Performance (cont'd)

Start, Grade and Speed

Shift Indicator

Vehicle equipped **without** Park Pawl. Shift indicator will display **RNDM**.

Start	Ratio	Desired	Calculated
Start grade capability in 1st gear	3.97	15.00 %	22.04 %
Start grade capability in reverse	3.13	15.00 %	17.34 %

Grade	Ratio	Desired	Calculated
Maximum grade in 4th gear	1.15	3.00 %	6.90 %
Maximum grade in 5th gear	0.86	3.00 %	5.15 %
Maximum grade in 6th gear	0.67	3.00 %	4.05 %

Speed	Desired	Calculated
Top Speed (level grade)	75 mph	91 mph
<i>To meet your requirement you need a maximum axle ratio of 7.46</i>		
Top Speed on 3.0% grade	55 mph	
<i>To meet your requirement you need a maximum of 197 hp</i>		
Cruise Speed	60 mph	65 mph
Engine RPM at desired cruise speed		2,117 rpm

Variables in Use


Rear axle ratio:	6.17/6.17	Governed RPM:	3,200 rpm
Tire size:	275/80R22.5 (509 rev/mile)	Frontal Area:	57.28 Sq.Ft.
Gross Vehicle Weight (GVW):	33,000 lbs	Cruising RPM	2,300 rpm
Clutch engagement torque:	337 ft.lbs.	Worst road surface	Typical Highway
Torque conversion ratio:	1.85	Final Drive Ratio:	0.67
Peak engine torque:	675 ft.lbs.	Drag Coefficient	0.80
Engine Power:	270 hp @ 2,400 rpm		

Prices and content availability as shown are subject to change and should be treated as estimates only. Actual base vehicle, package and option pricing may vary from this estimate because of special local pricing, availability or pricing adjustments not reflected in the dealer's computer system. See salesperson for the most current information.




Performance (cont'd)

Shift Chart

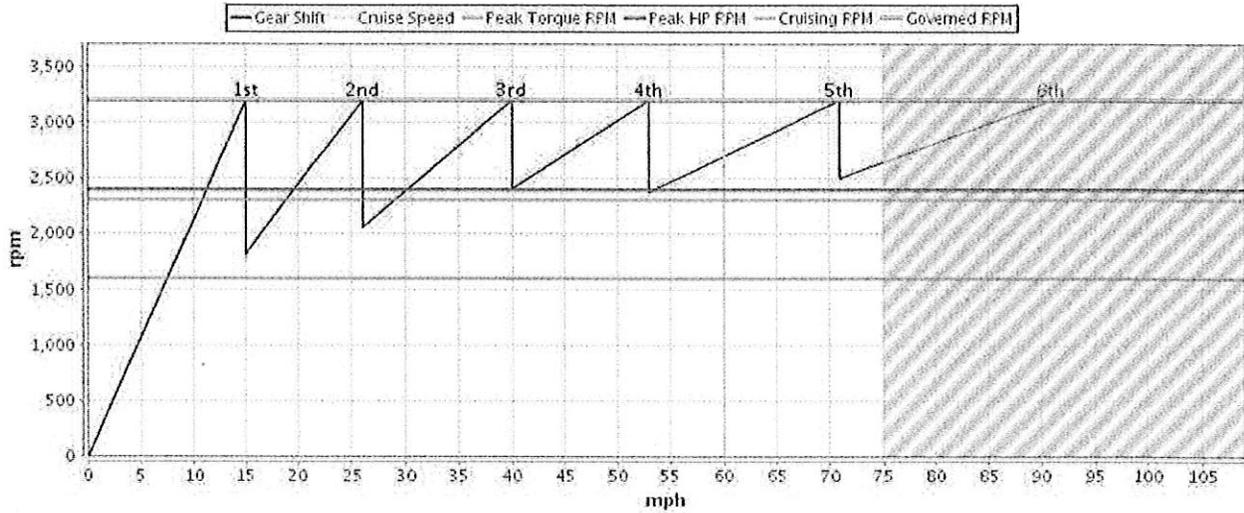

Turning Radius

Turning radius to curb: 31.69 ft
 Turning radius to bumper: 33.30 ft

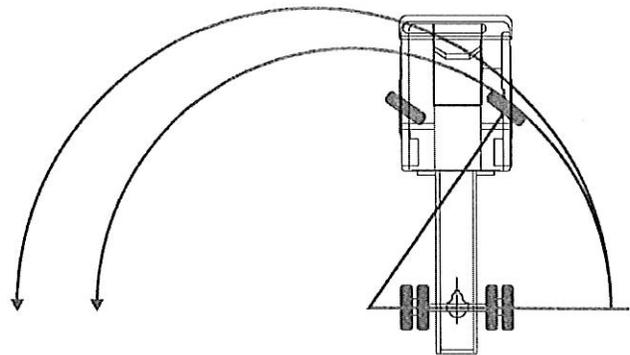

Prices and content availability as shown are subject to change and should be treated as estimates only. Actual base vehicle, package and option pricing may vary from this estimate because of special local pricing, availability or pricing adjustments not reflected in the dealer's computer system. See salesperson for the most current information.

Prepared for: Mr. Ken Crowley, City of Oak Park
 By: Mike Berger Date: 02/09/2017