



**BIDDERS NEED ONLY RETURN THOSE PAGES IDENTIFIED AS  
"MUST RETURN THIS PAGE WITH BID"**

**Project Name: Micro-surfacing and Crack-filling of Various Streets**

**Project Number: 17-6**

**Location: VILLAGE OF OAK PARK and VILLAGE OF RIVER FOREST**

Various Locations throughout the Village of Oak Park and Village of River Forest, Illinois

Submitted to the President and Board of Trustees

By: A. C. PAVEMENT STRIPING CO.  
Contractor's Name 695 CHURCH ROAD  
ELGIN, IL 60123

\_\_\_\_\_  
Address

\_\_\_\_\_  
City, State, Zip

**Return This Page with Bid**



## Notice To Bidders

### Time and Place of Opening of Bids

Sealed proposals for the improvement described below will be received at the Office of the Village Engineer, Village of Oak Park, Public Works Center, 201 South Blvd, Oak Park, Illinois 60302, Monday through Friday, 9:00 A.M. TO 4:00 P.M. until **11:30 A.M. on Thursday, May 18, 2017** at which time the proposals will be publicly opened and read.

### Description of Work

**Name:** Project 17-6 Micro-surfacing and Crack-filling of Various Streets

**Location:** Various locations throughout the Village of Oak Park and the Village of River Forest (see detailed maps and lists for exact locations).

**Description:** This work consists of cleaning and sealing of any cracks, voids or joints less than 2" in width with asphalt cement reinforced by polypropylene or polyester fibers; micro-surface application; and thermoplastic pavement marking application on various streets throughout the Village of Oak Park and Village of River Forest.

### Bidders Instructions

1. Plans and proposal forms will be available in the Office of the Village Engineer, 201 South Boulevard, Oak Park, Illinois 60302). No plans will be issued to prospective bidders after **4 P.M.** on the working day preceding the opening of bids. Proposals will not be accepted by the Village of Oak Park from Contractors who have failed to provide payment, if required, for obtaining proposal forms and have also **failed to register** with the Engineering Division of the Public Works Department as plan holders for this project.
2. At the bid opening, all proposals must be accompanied by a proposal guaranty, executed by a corporate surety company (bid bond) or a bank cashier's check in the amount of 5% of the amount bid.

3. The awarding authority reserves the right to waive technicalities and to reject any or all proposals as provided in Article 102.01 of the "Standard Specifications for Road and Bridge Construction," prepared by the Department of Transportation.
4. Bidders need not return the entire proposal when bids are submitted. Portions of the proposal that must be returned include the following:
  - a. Proposal Cover
  - b. Notice to Bidders
  - c. Contract Proposal (I)
  - d. Contract Schedule of Prices Form (II) (if required)
  - e. Proposal Bid Bond (III) (if required)
  - f. Contractor's Certification (IV)
  - g. Tax Compliance Affidavit (V)
  - h. Fair Employment Practices Affidavit of Compliance (VI)
  - i. Village of Oak Park EEO Report (VII)
  - j. Participation Statement
  - SCHEDULE C: Village of Oak Park Letter of Intent From MBE/WBE to Perform as a Subcontractor, Supplier, and/or Consultant
  - SCHEDULE D: Village of Oak Park M.WBE Participation

Note: All proposal documents, including Proposal Guaranty Checks or Proposal Bid Bonds, should be stapled together to prevent loss when bids are processed.

By Order of

**RETURN WITH BID**

---

Bill McKenna, Village Engineer



## Proposal (I)

A. C. PAVEMENT STRIPING CO.  
695 CHURCH ROAD  
ELGIN, IL 60123

1. Proposal of \_\_\_\_\_  
for: Project 17-6 Micro-surfacing and Crack-fill of Various Streets.
2. The plans for the proposed work are those prepared by the Engineering Division of the Village of Oak Park, Public Works Center, 201 South Blvd., Oak Park, Illinois on Thursday, May 4, 2017.
3. The specifications referred to herein are those prepared by the IL Department of Transportation and designated as "Standard Specifications for Road and Bridge Construction" and the "Supplemental Specifications" there to, adopted and in effect on the date of invitation of bids.
4. The undersigned agrees to accept, as part of the contract, the applicable Special Provisions indicated on the "Check Sheet for Supplemental Specifications and Recurring Special Provisions" contained in this proposal (if applicable).
5. The undersigned agrees to complete the work by September 22, 2017. All work under this contract shall be coordinated with a separate Pavement Patching Project by the Village which includes pavement patches on locations scheduled for micro-surfacing under this contract. The Pavement Patching Project is anticipated to be complete by July 14, 2017 on the locations scheduled for micro-surfacing under this contract. The undersigned agrees to start work after July 17, 2017 unless the Pavement Patching Project is completed earlier.
6. Accompanying this proposal is either a bid bond on Village Bond form, or a proposal guaranty check, complying with the specifications, made payable to the Village of Oak Park. The amount of the check is B.D Bond (\$ 590).
7. If this proposal is accepted and the undersigned fails to execute a contract and contract bond as required, it is hereby agreed that the Bid Bond or check shall be forfeited to the awarding authority.
8. Each pay item should have a unit price and a total price.
9. The unit price shall govern if no total price is shown or if there is a discrepancy between the product of the unit price multiplied by the quantity.
10. If a unit price is omitted, the total price will be divided by the quantity in order to establish a unit price.
11. A bid will be declared unacceptable if neither a unit price nor a total price is shown.
12. The undersigned firm certifies that it has not been convicted of bribery or attempting to bribe an officer or employee of the State of Illinois, nor has the firm made an admission of guilt of such conduct which is a matter of record, nor has an official, agent, or employee of the firm committed bribery or attempted bribery on behalf of the firm and pursuant to the direction or authorization of a responsible official of the firm. The undersigned firm further certifies that it is not barred from bidding on this contract as a result of a conviction for the violation of State laws prohibiting bid-rigging or bid-rotating.

13. This Contract is subject to Illinois Prevailing Wage Act, 820 ILCS 130/0.01 et seq

**Special Note:** The Prevailing Wage Act requires maintaining and submitting Certified Payroll records monthly for all entities working on this project.

14. Proposal Guaranty Check:

**Attach Cashier's Check or Certified Check Here**

**RETURN THIS PAGE WITH BID**

## SCHEDULE OF PRICES (II)

For complete information covering these items, see plans and specifications.

Fill in all unit prices and totals shown on the following pages.

	PAY ITEM	UNIT	OAK PARK	River Forest	TOTAL QUANT	UNIT PRICE	TOTAL
1	FIBER MODIFIED ASPHALT CRACK SEALING	POUND	20,590	29,487	50,077	1.55	77,619.35
2	MICROSURFACING, 1PASS TYPE II @20lb/sy	SQ YD	61,771		61,771	2.81	173,576.51
3	MICROSURFACING, 2PASS TYPE II @ 30lb/sy total	SQ YD	14,715		14,715	4.23	62,244.45
4	PAVEMENT MARKINGS REMOVAL	SQ FT	4,044		4,044	1.00	4,044.00
5	THERMOPLASTIC PAVEMENT MARKINGS, L & S	SQ FT	50		50	5.00	250.00
6	THERMOPLASTIC PAVEMENT MARKINGS, 4"	LIN FT	100		100	0.99	99.00
7	THERMOPLASTIC PAVEMENT MARKINGS, 6"	LIN FT	1,699		1,699	1.47	2,497.53
8	THERMOPLASTIC PAVEMENT MARKINGS, 12"	LIN FT	2,160		2,160	2.00	4,320.00
9	THERMOPLASTIC PAVEMENT MARKINGS, 24"	LIN FT	990		990	4.75	4,702.50
10	BITUMINOUS MATERIAL TACK COAT, IDOT STD. SPEC 406	POUND	4,298		4,298	1.92	8,252.16
11	FINE AGGREGATE (FA-6)	TON	12	10	22	30.00	660.00
						TOTALS:	338,265.50

RETURN THIS PAGE WITH BID

(IV)



## Proposal Bid Bond

WE A.C. Pavement Striping Co. As PRINCIPAL,  
and International Fidelity Insurance Company as SURETY,  
are held and firmly bound unto the Village of Oak Park, IL (hereafter referred to as "VOP") in the penal sum of 5% of the total bid price, or for the amount specified in Article 102.09 of the "Standard Specifications for Road and Bridge Construction" in effect on the date of invitation for bids. We bind ourselves, our heirs, executors, administrators, successors, and assigns, jointly to pay to the VOP this sum under the conditions of this instrument.

WHEREAS THE CONDITION OF THE FOREGOING OBLIGATION IS SUCH that, the said PRINCIPAL is submitting a written proposal to the VOP acting through its awarding authority for the construction of the work designated as the above section.

THEREFORE if the proposal is accepted and a contract awarded to the PRINCIPAL by the VOP for the above-designated section and the PRINCIPAL shall within fifteen (15) days after award enter into a formal contract, furnish surety guaranteeing the faithful performance of the work, and furnish evidence of the required insurance coverage, all as provided in the "Standard Specifications for Road and Bridge Construction" and applicable Supplemental Specifications, then this obligation shall become void; otherwise it shall remain in full force and effect.

IN THE EVENT the VOP determines the PRINCIPAL has failed to enter into a formal contract in compliance with any requirements set forth in the preceding paragraph, then the VOP acting through its awarding authority shall immediately be entitled to recover the full penal sum set out above, together with all court costs, all attorney fees, and any other expense of recovery.

IN TESTIMONY WHEREOF, the said PRINCIPAL and the said SURETY have caused this instrument to be signed by their respective officers this 18th day of May A.D. 20 17

A.C. Pavement Striping Co.

(Company Name)

By: William Brinati

(Signature & Title)

Corporate Secretary

PRINCIPAL

(Company Name)

By: \_\_\_\_\_

(Signature & Title)

(If PRINCIPAL is a joint venture of two or more contractors, the company names, and authorized signatures of each contractor must be affixed.)

International Fidelity Insurance Company

(Name of Surety)

SURETY

(Signature of Attorney-in-Fact) Harold Miller Jr.

STATE OF ILLINOIS,  
COUNTY OF \_\_\_\_\_

I, See Attached, a Notary Public in and for said county, do hereby certify that \_\_\_\_\_

(Insert names of individuals signing on behalf of PRINCIPAL & SURETY.)

who are each personally known to me to be the same persons whose names are subscribed to the foregoing instrument on behalf of PRINCIPAL and SURETY, appeared before me this day in person and acknowledged respectively, that they signed and delivered said instrument as their free and voluntary act for the uses and purposes therein set forth.

Given under my hand and notary seal this \_\_\_\_\_ day of \_\_\_\_\_ A.D. 20 \_\_\_\_\_

### NOTICE

1. Improper execution of this form (i.e. missing signatures or seals or incomplete certification) will result in bid being declared irregular.
2. If bid bond is used in lieu of proposal guaranty check, it must be on this form and must be submitted with bid.

My commission expires \_\_\_\_\_

\_\_\_\_\_  
Notary Public

**RETURN THIS PAGE WITH BID**

SURETY COMPANY ACKNOWLEDGMENT

STATE OF ( ILLINOIS )  
COUNTY OF ( COOK ) ss:

On this 18th day of May in the year 2017, before me personally came **Harold Miller Jr.**, to me known, who, being by me duly sworn, did depose and say that he resides in **St. Charles, Illinois**; that he is the **ATTORNEY-IN-FACT** of **International Fidelity Insurance Company**, the corporation described in and which executed the above instrument; that he knows the seal of said corporation; that the seal affixed to said instrument is such corporate seal; that it was so affixed by order of the board of directors of said corporation, and that he signed his name thereto by like order.

Sharon A. Foulk


  
Notary Public



STATE OF ( ILLINOIS )  
COUNTY OF ( KANE ) ss:

On this 18th day of May in the year 2017 before me personally came **William Brinati** to me known, who, being by me duly sworn, did depose and say that he/she resides in **Norridge, IL** and that he/she is the **Corporate Secretary** of the **AC Pavement Striping Co.**, the corporation described in and which executed the foregoing instrument; that he/she knows the seal of said corporation; that the seal affixed to said instrument is such corporate seal; that it was so affixed by order of the board of said corporation and that he signed his/her name thereto by like order.

Therese J. Tabor

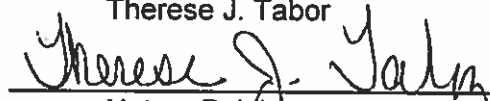  
Notary Public





# POWER OF ATTORNEY

## INTERNATIONAL FIDELITY INSURANCE COMPANY ALLEGHENY CASUALTY COMPANY

ONE NEWARK CENTER, 20TH FLOOR NEWARK, NEW JERSEY 07102-5207

KNOW ALL MEN BY THESE PRESENTS: That INTERNATIONAL FIDELITY INSURANCE COMPANY, a corporation organized and existing under the laws of the State of New Jersey, and ALLEGHENY CASUALTY COMPANY a corporation organized and existing under the laws of the State of Pennsylvania, having their principal office in the City of Newark, New Jersey, do hereby constitute and appoint

JODIE SELLERS, KATHLEEN WEAVER, JON A. SCHROEDER, WILLIAM T. KRUMM, KAREN E. SOCHA,  
SHARON A. SONDERMAN, MICHAEL ROBERT PESCH, ARLENE M. FILIPSKI, HAROLD MILLER JR.

Itasca, IL.

their true and lawful attorney(s)-in-fact to execute, seal and deliver for and on its behalf as surety, any and all bonds and undertakings, contracts of indemnity and other writings obligatory in the nature thereof, which are or may be allowed, required or permitted by law, statute, rule, regulation, contract or otherwise, and the execution of such instrument(s) in pursuance of these presents, shall be as binding upon the said INTERNATIONAL FIDELITY INSURANCE COMPANY and ALLEGHENY CASUALTY COMPANY, as fully and amply, to all intents and purposes, as if the same had been duly executed and acknowledged by their regularly elected officers at their principal offices.

This Power of Attorney is executed, and may be revoked, pursuant to and by authority of the By-Laws of INTERNATIONAL FIDELITY INSURANCE COMPANY and ALLEGHENY CASUALTY COMPANY and is granted under and by authority of the following resolution adopted by the Board of Directors of INTERNATIONAL FIDELITY INSURANCE COMPANY at a meeting duly held on the 20th day of July, 2010 and by the Board of Directors of ALLEGHENY CASUALTY COMPANY at a meeting duly held on the 15th day of August, 2000:

"RESOLVED, that (1) the President, Vice President, Chief Executive Officer or Secretary of the Corporation shall have the power to appoint, and to revoke the appointments of, Attorneys-in-Fact or agents with power and authority as defined or limited in their respective powers of attorney, and to execute on behalf of the Corporation and affix the Corporation's seal thereto, bonds, undertakings, recognizances, contracts of indemnity and other written obligations in the nature thereof or related thereto; and (2) any such Officers of the Corporation may appoint and revoke the appointments of joint-control custodians, agents for acceptance of process, and Attorneys-in-fact with authority to execute waivers and consents on behalf of the Corporation; and (3) the signature of any such Officer of the Corporation and the Corporation's seal may be affixed by facsimile to any power of attorney or certification given for the execution of any bond, undertaking, recognizance, contract of indemnity or other written obligation in the nature thereof or related thereto, such signature and seals when so used whether heretofore or hereafter, being hereby adopted by the Corporation as the original signature of such officer and the original seal of the Corporation, to be valid and binding upon the Corporation with the same force and effect as though manually affixed."

IN WITNESS WHEREOF, INTERNATIONAL FIDELITY INSURANCE COMPANY and ALLEGHENY CASUALTY COMPANY have each executed and attested these presents on this 22nd day of July, 2014.




STATE OF NEW JERSEY  
County of Essex

ROBERT W. MINSTER  
Chief Executive Officer (International Fidelity Insurance Company) and President (Allegheny Casualty Company)



On this 22nd day of July 2014, before me came the individual who executed the preceding instrument, to me personally known, and, being by me duly sworn, said he is the therein described and authorized officer of INTERNATIONAL FIDELITY INSURANCE COMPANY and ALLEGHENY CASUALTY COMPANY; that the seals affixed to said instrument are the Corporate Seals of said Companies; that the said Corporate Seals and his signature were duly affixed by order of the Boards of Directors of said Companies.

IN TESTIMONY WHEREOF, I have hereunto set my hand affixed my Official Seal, at the City of Newark, New Jersey the day and year first above written.



A NOTARY PUBLIC OF NEW JERSEY  
My Commission Expires April 16, 2019

### CERTIFICATION

I, the undersigned officer of INTERNATIONAL FIDELITY INSURANCE COMPANY and ALLEGHENY CASUALTY COMPANY do hereby certify that I have compared the foregoing copy of the Power of Attorney and affidavit, and the copy of the Sections of the By-Laws of said Companies as set forth in said Power of Attorney, with the originals on file in the home office of said companies, and that the same are correct transcripts thereof, and of the whole of the said originals, and that the said Power of Attorney has not been revoked and is now in full force and effect.

IN TESTIMONY WHEREOF, I have hereunto set my hand this

19th

day of May 2017

MARIA BRANCO, Assistant Secretary





## **CONTRACTOR CERTIFICATIONS (IV)**

- A. The undersigned hereby certifies that said vendor is not barred from bidding on the aforementioned contract as a result of a violation of either Section 33E-3 or 33E-4 of Article 33E of Chapter 38 of the Illinois Revised Statutes or Section 2-6-12 of the Oak Park - Village Code relating to "Bidding Requirements".
- B. The individual or entity making the foregoing proposal of bid certifies that he/she is not barred from contracting with the Village of Oak Park because of any delinquency in the payment of any tax administrated by the Department of Revenue unless the individual or entity is contesting, in accordance with procedures established by the appropriate revenue act, liability for the tax or the amount of the tax. The individual or entity making the proposal or bid understands that making a false statement regarding delinquency in taxes is a Class A misdemeanor and, in addition, voids the contract and allows the Municipality to recover all amounts paid to the individual or entity under the Contract in Civil action.
- C. The undersigned firm certifies that it has not been convicted of bribery or attempting to bribe an officer or employee of the State of Illinois and the Village of Oak Park, nor has the firm made an admission of guilt of such conduct which is a matter of record, nor has an official, agent, or employee of the firm committed bribery or attempted bribery on behalf of the firm and pursuant to the direction or authorization of a responsible official of the firm. The undersigned firm further certifies that it is not barred from bidding on this contract as a result of a conviction for the violation of State laws prohibiting bid-rigging or bid-rotating.
- D. The undersigned firm certifies that it is in compliance with House Bill 3337 which creates a Drug Free Workplace Act for Illinois with an effective date of January 1, 1992.

CONTRACTOR CERTIFICATIONS IV (CONT.)

Organization Name (IV)

(Seal - If Corporation)

By:

William Brinati  
Authorized Signature **WILLIAM BRINATI**  
CORPORATE SECRETARY

A. C. PAVEMENT STRIPING CO.  
Address 695 CHURCH ROAD  
847-214-9500 ELGIN, IL 60123  
Telephone

Subscribed and sworn to before me their 15<sup>th</sup> day of May, 2017.

Therese J. Tabor  
Notary Public



In the State of Illinois.

My Commission Expires: 3-29-20.

(Complete Applicable Paragraph Below)

(a) Corporation

The Vendor is a corporation, which operates under the legal name of

AC PAVEMENT STRIPING CO. and is organized and existing

under the laws of the State of Illinois.

The full names of its Officers are:

President Scott E. Kline

Secretary William Brinati

Treasurer \_\_\_\_\_

The corporation does have a corporate seal. (In the event that their proposal is executed by a person other than the President, attach hereto a certified copy of that section of Corporate By-Laws or other authorization by the Corporation that permits the person to execute the offer for the corporation.)

(b) Partnership

Name, Signature and Addresses of all Partners

---

---

---

The partnership does business under the legal name of

\_\_\_\_\_, which name is registered with  
the office of \_\_\_\_\_ in the county of  
\_\_\_\_\_.

(c) Sole Proprietor

The Vendor is a Sole Proprietor whose full name is

\_\_\_\_\_. If the Vendor is operating under  
a trade name, said trade name is \_\_\_\_\_,  
which name is registered with the office of \_\_\_\_\_  
in the county of \_\_\_\_\_.

Signed: \_\_\_\_\_  
Sole Proprietor

**Owner and / or Company Officer Information:**

Please provide the Name, Social Security Number, Drivers License Number and State of Issuance of Company Own and / and Officers.

Name	Title	SS#	Drivers License	State
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____

-----

RETURN THIS PAGE WITH BID
---------------------------

**CONTRACTOR'S CERTIFICATION IV (CONT.)**

AC PAVEMENT STRIPING CO., as part of its proposal on a contract for  
(name of contractor)  
micro-surfacing and crack filling of various streets to the Village of Oak Park, hereby  
(general description of item(s) proposal on) proj # 17-6

certifies that said contractor is not barred from proposing on the aforementioned contract as a result of a violation to either Section 33E-3 or 33E-4 of Article 33E of Chapter 38 of the Illinois Revised Statutes or Section 2-6-12 of the Oak Park Village Code relating to "Proposing Requirements".


By: *William Brinati*  
(Authorized Agent of Contractor)

**WILLIAM BRINATI  
CORPORATE SECRETARY**

Subscribed and sworn to

before me their 15<sup>th</sup> day of  
May, 2017.

*Therese J. Tabor*  
Notary Public



**RETURN THIS PAGE WITH BID**

IV

CONTRACTOR'S CERTIFICATION (cont.)

AC PAVEMENT STRIPING CO, as part of its proposal on a contract for  
(name of contractor)  
micro-surfacing and Crack Filling  
of Various Streets Proj # 17-6 to the Village of Oak Park, hereby  
(general description of item(s) proposal on)

certifies that said contractor is in compliance with House Bill 3337 which creates a Drug Free Workplace Act for Illinois with an effective date of January 1, 1992.


By: *William Brinati*  
(Authorized Agent of Contractor)  
**WILLIAM BRINATI**  
CORPORATE SECRETARY

Subscribed and sworn to

before me their 15<sup>th</sup> day of

May, 2017

*Therese J. Tabor*  
Notary Public



**RETURN THIS PAGE WITH BID**

V

**TAX COMPLIANCE AFFIDAVIT**

William Brinati, being first duly sworn, deposes and  
says: that he/she is Corporate Secretary of  
(partner, officer, owner, etc.)

AC PAVEMENT STRIPING CO.

(contractor)

The individual or entity making the foregoing proposal or proposal certifies that he/she is not barred from contracting with the Village of Oak Park because of any delinquency in the payment of any tax administered by the Department of Revenue unless the individual or entity is contesting, in accordance with the procedures established by the appropriate revenue act, liability for the tax or the amount of the tax. The individual or entity making the proposal or proposal understands that making a false statement regarding delinquency in taxes is a Class A Misdemeanor and, in addition, voids the contract and allows the municipality to recover all amounts paid to the individual or entity under the contract in civil action.


**WILLIAM BRINATI  
CORPORATE SECRETARY**

William Brinati  
(Name of Contractor if the Contractor is an Individual)  
(Name of Partner if the Contractor is a Partnership)  
(Name of Officer if the Contractor is a Corporation)

The above statement must be subscribed and sworn to before a notary public.

Subscribed and sworn to their 15th day of May, 2017.

Therese J. Tabor  
Notary Public

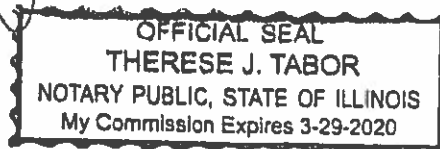

**RETURN THIS PAGE WITH BID**



### **Minority Business and Women Business Enterprises Requirements:**

The Village of Oak Park in an effort to reaffirm its policy of non-discrimination, encourages and applauds the efforts of contractors and subcontractors in taking affirmative action and providing Equal Employment Opportunity without regard to race, religion, creed, color, sex, national origin, age, handicap unrelated to ability to perform the job or protected veteran's status.

### **Reporting Requirements:**

The following forms must be completed in their entirety, notarized and included as part of the bid proposal document. Failure to respond truthfully to any question on this list or failure to cooperate fully with further inquiry by the Village of Oak Park will result in disqualification of your bid.

- VI. Fair Employment Practices Affidavit of Compliance
- VII. Village of Oak Park E.E.O. Report (2 Pages)

### **Disadvantaged Business Participation Reporting**

In an effort to reaffirm its commitment to DBE participation the Village of Oak Park asks each general contractor bidding on Public Works Projects to report on their utilization of Minority and Women Business Enterprises. Please list the MBE/WBE companies working as sub-contractors and/or suppliers on the DBE participation statement included herewith. Feel free to make additional copies of this form if necessary and include with your bid.



VI

**FAIR EMPLOYMENT PRACTICES  
AFFIDAVIT OF COMPLIANCE**

NOTE: The affidavit must be executed and submitted with the signed proposal form. No proposals can be accepted by the Board of Trustees of the Village of Oak Park unless said affidavit is submitted concurrently with the proposal.

William Brinati, being first duly sworn, deposes and says that  
(name of person making the Affidavit)

Corporate Secretary of AC PAVEMENT STRIPING CO. and that he/she  
(Title or Office) (Name of Company)

has the authority to make the following affidavit; that he/she has the knowledge of the Village of Oak Park Ordinance relating to Fair Employment Practices and knows and understands the contents thereof; that he/she certifies hereby that \_\_\_\_\_  
(Name of

AC PAVEMENT STRIPING CO.  
\_\_\_\_\_ is an "Equal Opportunity Employer" as defined by Section 2000  
company)

(E) of Chapter 21, Title 42 of the United States Code Annotated and Federal Executive Orders #11246 and #11375 which are incorporated herein by reference.

*William Brinati*  
WILLIAM BRINATI  
CORPORATE SECRETARY

Subscribed and sworn to before

me their 15th day of

May, 2017.

*Therese J. Tabor*  
Notary Public



RETURN THIS PAGE WITH BID

## VII

### VILLAGE OF OAK PARK E.E.O. REPORT

Please fill out the form completely. Failure to respond truthfully to any questions on the form, or failure to cooperate fully with further inquiry by the Village of Oak Park will result in disqualification of proposal. An incomplete form will disqualify your proposal. For assistance in completing the form, contact Bill McKenna (708) 358-5722.

1. Vendor Name: AC PAVEMENT STRIPING CO

2. Check here if your firm is:

☐ MBE  
☐ WBE  
☐ DBE  
☒ Non-MBE/WBE

*\*Note if your firm is an M/WBE please fill out the attached affidavit (copies of all certification letters must be included)*

3. What is the size of the firm's current stable work force?

53 Number of full-time employees  
☐ Number of part-time employees

4. Similar information will be requested of all subcontractors working on the contract. Forms will be furnished to the low responsible bidder or contractor with the notice of contract award, and these forms must be completed and submitted to the Village before the execution of the contract by the Village.

**RETURN THIS PAGE WITH BID**

**VII (Continued)**  
**VILLAGE OF OAK PARK**  
**EEO REPORT**

Vendor Name AC PAVEMENT STRIPING CO.  
 Total Employees

Job Categories	Total Employees	Total Males	Total Females	Males				Females				Total Minorities
				Black	Hispanic	American Indian & Alaskan Native	Asian & Pacific Islander	Black	Hispanic	American Indian & Alaskan Native	Asian & Pacific Islander	
Officials & Managers	4	4										
Professionals												
Technicians	2	2			1							1
Sales Workers												
Office & Clerical	1		1									
Traffic Safety Worker/Kit Striper	36	35	1		38				1			39
Laborers	4	3	1		3							3
Service Workers	6	6			3							3
TOTAL	53	50	3		34				1			35
Management Trainees												
Apprentices												

This completed and notarized report must accompany your bid. It should be attached to your Affidavit of Compliance. Failure to include it with your bid will be disqualify you from consideration.

**An EEO-1 Report may be submitted in lieu of this report.**

William Brinati being first duly sworn, deposes and says that he/she is the Corporate Secretary  
 (Name of Person Making Affidavit) (Title or Officer)  
 of AC Pavement Striping Co. and that the above EEO Report information is true and accurate and is submitted with the intent that it

be relied upon. Subscribed and sworn to before me this 15th day of May, 2017.  
William Brinati (Signature)  
5-15-17 (Date)

**RETURN THIS PAGE WITH BID**

## **Participation Statement**

(1) Instructions

**Submit: Schedule C and Schedule D with Bid Documents**

**SCHEDULE C:**

**VILLAGE OF OAK PARK LETTER OF INTENT FROM MBE /WBE  
TO PERFORM AS A SUBCONTRACTOR, SUPPLIER AND/OR CONSULTANT**

M/WBE Firm: \_\_\_\_\_ Contract #: \_\_\_\_\_

Address: \_\_\_\_\_ City/State/Zip: \_\_\_\_\_

Contact Person: \_\_\_\_\_ Phone: \_\_\_\_\_ Fax: \_\_\_\_\_

Certification Expiration Date: \_\_\_\_\_ Race/Gender: \_\_\_\_\_

Will the M/WBE firm be subcontracting any of the performance of this contract to another firm?

☐ No ☐ Yes – Please attach explanation.

Proposed Subcontractor:

\_\_\_\_\_  
The undersigned M/WBE is prepared to provide the following Commodities and or Services for the above named Project/Contract:

\_\_\_\_\_  
Indicate the **Total Dollar Amount**, the **Percentage**, and the **Terms of Payment** for the above-described Commodities/Services:

\_\_\_\_\_  
(If more space is needed to fully describe the M/WBE Firm's proposed scope of work and/or payment schedule, attach additional sheets.)

Prime Bidder/Proposer declares and affirms that the facts and representations set forth herein are true and correct and no material facts have been omitted.

\_\_\_\_\_  
Signature (M/WBE)

\_\_\_\_\_  
Signature (Prime Bidder/Proposer)

\_\_\_\_\_  
Print Name

\_\_\_\_\_  
Print Name

\_\_\_\_\_  
Firm Name

\_\_\_\_\_  
Firm Name

\_\_\_\_\_  
Date

\_\_\_\_\_  
Date

Subscribed and sworn before me this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_,

\_\_\_\_\_  
(SEAL)

Signature of Notary Public

My Commission expires on \_\_\_\_\_

**RETURN THIS PAGE WITH BID**

**SCHEDULE D:  
VILLAGE OF OAK PARK  
M/WBE PARTICIPATION AFFIDAVIT**

Contract #: \_\_\_\_\_ Contract Value: \$ \_\_\_\_\_

Contact Person: \_\_\_\_\_ Phone: \_\_\_\_\_ Fax: \_\_\_\_\_

Description of Commodities/Services to be provided by the Bidder/Proposer on this Contract:

\_\_\_\_\_

Any questions regarding compliance with these requirements should be directed to:

Finance Department  
The Village of Oak Park, 123 Madison Street, Oak Park, Illinois 60302  
PHONE: 708.358.5460, FAX: 708.358.5105.

I, \_\_\_\_\_ (print name)  
hereby agree to comply with and be bound by the provisions to submit, as part of this bid/proposal, a detailed M/WBE Participation Plan with and at the time and place of the submissions of this bid/proposal; that the M/WBE Participation Plan is an element of bidder/proposer responsiveness and responsibility; and are incorporated as part of the contract; that heirs, executors, and administrators or assigns and any other persons or entities claiming by or through the bidder/proposer including but not limited to insurance companies, bonding companies, or sureties are bound by this agreement; and do declare and affirm that, to the best of my knowledge, information and belief, the facts and representations set forth in this M/WBE Participation Affidavit are true and correct, and that no material facts have been omitted.

_____ Signed		_____ Name and Title (Print)
_____ Firm Name (Print)		_____ Firm Address (Print)
_____ Phone	_____ Fax	_____ City/State/Zip

**SUBSCRIBED AND SWORN** before me this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_,

\_\_\_\_\_  
Signature of Notary Public

**(SEAL)**

**RETURN THIS PAGE WITH BID**

**SCHEDULE D (Cont.):**  
**M/WBE PARTICIPATION AFFIDAVIT**

M/WBE firms may participate in the performance of this contract, either DIRECTLY or INDIRECTLY, as:  
Prime Bidders/Proposers; Joint Venture Partners; Subcontractors; and/or Suppliers.

Name of M/WBE Firm:		Race / Gender:	
Address:			
City/State/Zip:			
Telephone No.:		Fax:	
Contact Person:			
Dollar Amount: \$	%	Schedule C attached? [ ] Yes [ ] No	
Description of Commodity/Service:			

Name of M/WBE Firm:		Race / Gender:	
Address:			
City/State/Zip:			
Telephone No.:		Fax:	
Contact Person:			
Dollar Amount: \$	%	Schedule C attached? [ ] Yes [ ] No	
Description of Commodity/Service:			

Name of M/WBE Firm:		Race / Gender:	
Address:			
City/State/Zip:			
Telephone No.:		Fax:	
Contact Person:			
Dollar Amount: \$	%	Schedule C attached? [ ] Yes [ ] No	
Description of Commodity/Service:			

Total MBE \$ _____	_____ %
Total WBE \$ _____	_____ %
Grand Total MBE \$ _____	_____ %
Grand Total WBE \$ _____	_____ %

**RETURN THIS PAGE WITH BID**

The undersigned affirms that the foregoing statements are true and correct and include all material information necessary to identify and explain the terms and operations of our joint venture and the intended participation of each partner in the undertaking. Further, the undersigned covenants and agrees to provide to the Village of Oak Park current, complete and accurate information regarding actual joint venture work and the payment therefore, and any proposed changes in any provision of the joint venture agreement, and to permit the audit and examination of the books, records and files of the joint venture, or those of each partner relevant to the joint venture by authorized representatives of the Village of Oak Park.

Any material misrepresentation will be grounds for terminating any contract which may be awarded and for initiating action under federal and state laws concerning false statements.

Note: If after filing this Schedule D and before the completion of the joint venture's work on the project, there is any change in the information submitted, the joint venture must submit a revised version of this document to the Village of Oak Park either directly, or through the prime contractor if the joint venture is a subcontractor.

_____ Name of MBE/WBE Partner Firm	_____ Name of non-MBE/WBE Partner Firm
_____ Signature of Affiant	_____ Signature of Affiant
_____ Name and Title of Affiant	_____ Name and Title of Affiant
_____ Date	_____ Date

On this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_, the above signed officers \_\_\_\_\_,  
(names of affiants)

personally appeared and, known to me are the persons described in the foregoing Affidavit, acknowledged that they executed the same in the capacity therein stated and for the purpose therein contained.

IN WITNESS WHEREOF, I hereunto set my hand and seal.

\_\_\_\_\_  
Signature of Notary Public

(SEAL)

Commission Expires: \_\_\_\_\_

**RETURN THIS PAGE WITH BID**



### **NO PROPOSAL EXPLANATION**

**Project** \_\_\_\_\_

If your firm does not wish to submit a proposal on the attached specifications, please return the *Request For Proposal* along with any comments you may have concerning the proposal or any related factors you feel were areas that prevented your firm from submitting the proposal.

Thank you.

## Surface Patching, Crack-filling and Micro-Surfacing of Various Streets

### SPECIAL PROVISIONS

Introduction and Completion Dates .....	25
General Requirements .....	26
Traffic Control and Protection, Final Payment and Retention .....	31
Street Closure Notification, Thermoplastic Pavement Markings.....	32
Fiber Modified Asphalt Crack Sealing .....	33
Pavement Marking Removal, Fine Aggregate (FA-6).....	35
Micro-surfacing .....	36
Bituminous Material (Prime coat).....	37

## Introduction and Completion Dates

The contract and work shall be carried out in conformance with the Ordinances of the Village of Oak Park, the attached Plans and Special Provisions, and the latest editions of the following:

- Illinois Department of Transportation "Standard Specifications for the Road and Bridge Constructions" adopted January 1, 2016, hereinafter referred to as the "Standard Specifications",
- BDE Special Provisions
- "Supplemental Specifications and Recurring Special Provisions," adopted January 1, 2016
- "Standard Specifications for Traffic Control Items",
- "Illinois Manual on Uniform Traffic Control Devices for Streets and Highways".

Plan notes shall take precedence over specifications. Special Provisions are supplemental to said specifications, and in case of conflict with any part or parts of said specifications, said special provisions shall take precedent and shall govern.

## Completion of Contract:

The application of Micro-surfacing shall be completed by September 8, 2017.

All work, as specified shall be completed by September 22, 2017.

## Alterations, Omissions and Extra Work:

The Village reserves the right to increase or decrease the quantity of any item or portion of the work, or to omit portions of the work, as may be deemed necessary.

## Insurance Requirements:

The Contractor shall name the Village of Oak Park and the Village of River Forest as additionally insured under the Contractor's general liability insurance policy in accordance with Article 107.27. Insurance coverage or limits of liability specified in Article 107.27 (d) Umbrella Liability shall be revised according to the limits specified.

- |                          |                |
|--------------------------|----------------|
| 1) Each Occurrence Limit | \$2,000,000.00 |
| 2) Aggregate Limit       | \$2,000,000.00 |

## **GENERAL REQUIREMENTS**

### **1. EXISTING MATERIALS:**

If during the progress of work involving this contract, certain existing structures, equipment and material are removed from service, all items deemed of value by the Engineer such as street furniture, brick pavers, lighting units, frames and covers, hydrants, roundways, valve boxes and other such salvageable material shall remain the property of the Village of Oak Park. The contractor shall collect and store said material on the job site for pick-up by the Village or as otherwise specified herein.

### **2. SPRINKLING SYSTEMS**

The contractor shall be careful not to damage sprinkling systems that may be located in parkways or lawns adjacent to the curbs and sidewalks, and any damage done to the sprinkling systems due to his negligence shall be repaired by the contractor at his expense to the satisfaction of the Engineer.

If adjustments to the sprinkling systems are needed due to pavement widening or change to the parkway grade, the Contractor shall retain a licensed irrigation contractor to make such adjustments. This work will be paid for separately as specified in this contract.

### **3. STORAGE OF MATERIALS AND EQUIPMENT**

At no time shall the contractor store material and equipment in areas other than those specified by the Engineer. Any damage to sidewalks, curbs, trees, and parkways due to the negligence of the contractor shall be restored by the contractor at his own expense. No additional compensation shall be allowed the contractor for compliance with this requirement.

At no time will the Contractor store material and equipment in parkways areas within tree drip line. The General Contractor is encouraged to protect these areas with "snow fencing" to avoid accidental material dump.

The contractor shall maintain during the entire construction period barricades and warning lights at all material storage areas and around parked construction equipment.

### **4. EXAMINATION OF PLANS, SPECIFICATIONS, SPECIAL PROVISIONS AND WORK:**

The bidder shall comply with Article 102.05 of the Standard Specifications relative to examination of the Plans, Specifications, Special Provisions and site of work and hereby is advised that due to the nature of the contract, special emphasis shall be

placed on inspection in detail of the site of the proposed work and familiarization with all local conditions, traffic and otherwise, affecting the contract and the detailed requirements for construction.

## 5. EXISTING UTILITIES

The contractor shall call JULIE at telephone number: 1 (800) 892-0123 for location of underground utilities prior to beginning of construction so that buried services in the location of construction may be located and staked. Where adjustments of the utility frames are necessary, the contractor shall contact the respective utility company and make arrangements for their adjustments.

The contractor shall also notify the Water and Sewer Division of the Village of Oak Park as well as the Street Lighting Division prior to the start of construction at any location. Any damage by the contractor to street light cables and water services shall be repaired or replaced by the contractor at his own expense.

The contractor shall make his own investigation to determine the existence, nature and location of all utility lines and appurtenances within the limits of the improvement.

The contractor shall be held responsible for any damage to existing utility lines and appurtenances resulting from the operations of his equipment or men. No extra compensation will be allowed to the contractor for any expense incurred because of delays, inconvenience or interruption to his work resulting from compliance with the above requirements.

## 6. CLEANING EXISTING STRUCTURES:

All catch basins, manholes, inlets and similar structures newly constructed, adjusted or reconstructed under this contract shall be cleaned of any accumulation of silt, debris, or foreign matter of any kind and all shall be free from such accumulations at the time of final inspection.

## 7. FIELD OFFICE AND FIELD LABORATORY:

Engineer's field office and field laboratory will not be required for this improvement.

## 8. LANDSCAPING WORK

### Use of Pesticides:

*The Contractor is hereby notified that in the event pesticides are to be used in any of the landscape operations of this project, he and/or his subcontractors shall comply with the requirements of Village Code, Chapter 20, Section 10. This code requires the applicator to be licensed in the Village, that the area treated shall be posted at time of application, and the time and location be logged by the applicator.*

The work necessary to fulfill these requirements as well as any license fees shall be considered incidental to the Landscaping Pay Items.

### Planting and Sodding

To prevent drying of materials during excessive heat, the Contractor shall schedule final planting / sodding operations AFTER September 1<sup>st</sup>.

## **9. STAGING AND COMPLETION OF CONTRACT**

The contractor shall stage his work in such a way as to cause the least amount of disruption to local traffic access. Close attention shall be paid to the proposed schedule included in these Special Provisions. Specific Pay Items have been included in this project for the contractor to provide the necessary protection to the pavements so that safe and sufficient access to the area is not hampered.

The contractor is hereby reminded of the deadline for completion of this project. The contractor shall pay close attention to this completion date. All work under this contract must be completed by this date. Should the Contractor fail to complete work by the completion date, the Village will assess liquidated damages in accordance with Section 108.09 of the Standard Specifications.

The completion date pertains to the work items outlined in this contract. Any "Punch List" work that is required shall be completed within 30 days of the completion date of this project. Failure to complete any/all punch list work will result in forfeiture of any retainer held in this contract.

As indicated in Article 108.02 of the Standard Specifications, the contractor shall provide the Engineer with a progress schedule prior to starting work, preferably at the time of the pre-construction meeting.

## **10. MAINTENANCE OF ROADWAYS:**

Beginning on the date that the contractor begins work on this project, he shall assume responsibility for the normal maintenance of all existing roadways with the limits of the improvement. This normal maintenance shall include all repair work deemed necessary by the Engineer. (e.g. pot hole patching, street sweeping, refilling trenches over proposed installations, etc.)

Specific Pay Items have been included in this contract to assure that this maintenance work is performed to the satisfaction of the Village. We strongly urge the contractor to utilize these resources so as to reduce the inconvenience of the residents living in these construction areas.

## **11. CONCRETE BREAKERS:**

When removing pavement, curb and gutter, shoulder, and/or any other structures, the use of any type of concrete breakers which might damage underground public or private utilities will not be permitted. Under no circumstances will the use of a frost ball be permitted.

## **12. FINE AGGREGATE FOR PORTLAND CEMENT CONCRETE AND CLASS SI CONCRETE:**

The gradation for fine aggregate for Portland Cement Concrete and Class SI Concrete shall conform to gradation FA 2 as called for under Article 703.02(c) of the Standard Specifications.

## **13. PROVISIONS FOR CURING TEST SAMPLES:**

The contractor will be required to provide storage space, meeting the approval of the Engineer for the initial curing of quality control test specimens made on the project. The storage space shall be such that it will give full protection against direct sunlight, the elements, pilfering and damage. When requested by the Engineer, heat shall be provided by the contractor, with a minimum temperature of 60 degrees Fahrenheit maintained for as long as required.

## **14. COOPERATION BY CONTRACTOR AND WEEKLY PROGRESS MEETINGS:**

Attention is hereby focused on Article 105.06 of the Standard Specifications with regards to the Contractor having on site at all times "A competent English Speaking Superintendent". This superintendent shall be able to be reached at all times including the days subcontractors are only working on the site. All work instructions shall be channeled through the superintendent.

Weekly progress meetings will be conducted in the Engineer's office. These meetings will focus on the work slated for the upcoming week and highlight of work completed the prior week. If work is found to be progressing smoothly, these meetings may be scheduled on a bi-weekly basis.

## **15. WORK HOURS AND SCHEDULING LAYOUT OF LINES AND GRADES**

The Village of Oak Park Code restricts construction to the hours of 7:00 A.M. and 6:00 P.M., 7 days a week. No equipment may be started on any part of the project prior to 7:00 A.M. Violations of this code are subject to Police enforcement and subsequent fines as outlined in the code.

In the Village of River Forest allowed hours for construction are from 7:00 A.M. to 6:00 P.M. Monday through Friday, and 8:00 A.M. to 5:00 P.M. on Saturday. No work is allowed on Sunday.

The contractor shall notify the Resident Engineer a full 24 hours in advance of any layout and/or grade requests. Any requests for layout and grades that are made less than 48 hours in advance will require payment of premium time for the Resident Engineer and Engineering Technician. Such costs will be billed directly to the contractor at a rate of \$75.00 per hour for the two staff members.

## **16. WORKING IN THE AREA OF EXISTING PARKWAY TREES:**

No nails or tacks of any sort shall be used for installing temporary "No Parking" signs on any trees. The contractor shall notify the Village Forester of any potential conflicts

between their equipment and parkway trees. The Forester will determine the course of action necessary to reduce such conflict. Also any excavation which disturbs tree roots shall be brought to the attention of the Village Forester. In the event roots need to be trimmed, the hand tools (saw, axe) capable of making a clean, smooth cut shall be used to trim such roots. This work shall be considered incidental to the contract.

## **17. STREET CLOSURES AND PARKING CONFLICTS**

The Village of Oak Park requires a notice of a street closure. The Contractor must notify the Oak Park Police Dept. and Fire Dept. of these closures.

The Village of River Forest also requires a notice for street closure. The Contractor shall notify the Engineer 48 hours prior to the street closure.

When the Contractor will be working on a block that requires closure and/or changes to parking restrictions they must coordinate with the Parking Dept. to develop an alternate parking plan for permitted parkers and provide information and notice so residents/permitted parkers are aware of their alternatives.

## **18. USE OF FIRE HYDRANTS**

If the Contractor desires to use water from fire hydrants, meters and keys shall be obtained from Water and Sewer Department. Upon return of this equipment, the Contractor will be billed for the water used at the current rate. This applies to all pay items which require using the water, including but not limited to parkway restoration, watering plants, dust control, maintenance of roadways, trenches jetting, asphalt cold milling operations, asphalt rolling operations, etc.

The Contractor shall be held responsible for any damage to fire hydrants, meters, and keys resulting from the operations of his equipment or men. The damaged parts and/or tools shall be replaced and/or repaired by the contractor at his expense to the satisfaction of the Water and Sewer Supervisor and project Engineer.

Fire hydrants shall be accessible at all times to the Fire Department. No materials or other obstructions shall be placed closer to a fire hydrant than 15 feet. Any arrangements of less than 15 feet must be approved by the Fire Department.

## **19. DISPOSAL OF DEBRIS AND EXCAVATED OR REMOVED MATERIALS**

The Contractor is responsible for removal and disposal of all waste material, asphalt, grindings, concrete, stone, dirt or debris generated in the course of the work. The temporary storing of excavated materials on the parkways is not allowed. It shall be the Contractor's responsibility to find an approved dump site for debris and any excavated material.



## TRAFFIC CONTROL AND PROTECTION

Traffic control shall be in accordance with the applicable sections of the Standard Specifications for Road and Bridge Construction Section 700, the applicable guidelines contained in the Illinois Manual on Uniform Traffic Control Devices for Streets and Highways, these special provisions, and any special details and Highway Standards.

During patching operations the contractor or sub-contractor shall maintain through traffic at all times and shall furnish all necessary signs, markings, cones, barricades, warning lights, flagmen and other traffic control devices as may be required to provide for a safe work environment.

During crack-fill operations and curing time the contractor shall maintain through traffic at all times and shall furnish all necessary signs, markings, cones, barricades, warning lights, flagmen and other traffic control devices as may be required to provide for a safe work environment.

During micro-paving operation and curing time the contractor shall keep the street closed and shall furnish all necessary signs, markings, cones, barricades, warning lights, flagmen and other traffic control devices as may be required to provide for a safe work environment.

This item will be considered incidental to the contract and no additional compensation will be made to comply with the requirements as set forth in the standards outlined above.

## FINAL PAYMENT AND RETAINAGE

Payments to the Contractor shall be made as estimates of satisfactory work completed to date minus a 5% (five percent) retainage. Final payment and any remaining retention shall be made upon satisfactory completion of contracted work, submission of material quantity tickets and certified payroll.

## STREET CLOSURE NOTIFICATION

The Contractor shall notify residents 24 hours before the street closure. The notification flyers shall be hand delivered to every house within the closure zone, and NO PARKING signs shall be installed along the block.

For the Village of Oak Park, refer to the Oak Park General Requirements Special Provision, Paragraph 17:

*The Village of Oak Park requires a notice of a street closure. The Contractor must notify the Police Dept. and Fire Dept. of these closures.*

*When the Contractor will be working on a block that requires closure and/or changes to parking restrictions they must coordinate with the Parking Dept. to develop an alternate parking plan for permitted parkers and provide information and notice so residents/permitted parkers are aware of their alternatives.*

For work in the Village of River Forest, the Contractor shall notify the Engineer 48 hours prior to the street closure.

This item shall be considered incidental to the contract and no additional compensation will be made to comply with the requirements as set forth in the standards outlined above.

## THERMOPLASTIC PAVEMENT MARKINGS

### Description:

The installation of Thermoplastic Pavement Markings shall meet the requirements of Section 780 of the Standard Specifications.

### Method of Measurement:

Lines will be measured for payment in place in feet to the nearest tenth. Double yellow lines will be measured as two separate lines.

### Basis of Payment:

This work will be paid for at the contract unit price per LINEAL FOOT for THERMOPLASTIC PAVEMENT MARKINGS - LINE, of the size and color specified.

The price shall be payment in full for furnishing all materials, labor and equipment necessary to complete the work as specified herein and to the satisfaction of the Engineer.

## **FIBER MODIFIED ASPHALT CRACK SEALING**

### **Description**

This item shall meet the requirements of the Section 451 of Standard Specifications and the BDE Special Provision for Preventive Maintenance – Micro-surfacing, except as specified herein, and consists of sealing and cleaning of cracks, voids or joints with asphalt cement reinforced by polypropylene fibers.

**Material Inspection:** The Contractor shall provide the Village of Oak Park with letters of certification from each supplier that all materials used in the project comply with the Standard Specifications and Special Provisions indicated.

**Street Sweeping:** Immediately prior to crack filling the Contractor shall sweep and clean the streets to make sure the surface is in acceptable condition. Any mechanical sweeping, hand brooming and/or clean up before or after crack fill application will be included in the cost of FIBER MODIFIED ASPHALT CRACK SEALING.

**Material:** The sealant shall consist of a mixture either polypropylene or polyester fibers with liquid asphalt cement. The use of ready-mixed fiberized asphalt blocks shall not be allowed. The asphalt cement shall be PG 64-22 and meet the requirements of Article 1032.05 of Standard Specifications.

Fibers shall either be short cut polypropylene or polyester fibers chosen by the contractor. A certificate from the supplier showing that the fibers meet the physical properties stated in the BDE Special Provision b), (1), b. (attached).

**Preparation of Mixture:** The sealant materials shall be combined in an oil jacketed double wall kettle (min 350 gallon capacity) equipped with a reversing rotary auger action agitator and separate thermometers for the oil bath and the mixing chamber. The unit shall also be equipped with a reversible hydraulic two inch hot asphalt pump and a recirculating pump to circulate the oil bath. Operating temperature in the kettle should be between 255 and 285° F, and shall never exceed 290° F.

**Construction Methods:** The sealant material shall only be applied when the joints and cracks and adjacent pavement surfaces are dry and clean. The cracks and joints to be sealed shall be cleaned by air blasting, hand tools, or other method approved by the Engineer to remove all foreign material for proper bonding of the sealant. The mixture shall be installed under high pressure directly into and over the crack or joint. The crack shall be completely filled to its full depth and a membrane 1/8 inch (+/- 1/16 inch) by 3 inches wide shall be formed on the surface of the pavement.

The Contractor must use caution to avoid excessive use of the material in either thickness or location. Material placed in excess of 103% of the historic application rates of 0.19, pounds per square yard for streets designated as light application,

0.26 pounds per square yard for medium application and 0.35 pounds per square yard for heavy application will not be paid for without prior approval of the Engineer.

The Contractor must ensure that material does not come into contact with structure frames or lids. Any misplaced material must be immediately removed and the frame or lid cleaned.

Traffic shall not be allowed on the sealant until properly cured. The sealant shall be dusted with fine aggregate (FA-6) if the ambient temperature is greater than 75°F and the street must be opened to traffic. The Contractor is cautioned on the excessive use of sand.

#### **Method of Measurement**

The FIBER MODIFIED ASPHALT CRACK SEALING will be measured in pounds of crack-fill material installed.

At the end of each working day the Contractor shall obtain a weight certification and shall submit the documentation to the Engineer daily. Work shall not begin until weight certifications for the previous day's work have been submitted to the Engineer.

#### **Basis of Payment**

This work will be paid for at the contract unit price per POUND for FIBER MODIFIED ASPHALT CRACK SEALING and will be considered full compensation for all labor, equipment, and materials to complete the described work.

## **PAVEMENT MARKING REMOVAL**

### **Description**

This work shall consist of removing existing pavement markings (thermo-plastic) at those locations necessary to insure a smooth existing condition for micro-surfacing. The engineer shall mark these locations prior to the onset of work.

The Contractor shall be responsible for supplying all the equipment and material necessary for the completion of this work. The existing pavement markings shall be removed from the by a method that does not cause excessive materially damage to the pavement surface. Refer to Sections 783.01 to 783.06 of the Standard Specifications for Road and Bridge Construction adopted April 1, 2016 for acceptable equipment and cleaning.

### **Basis of Payment**

This work will be paid for at the contract unit price per square foot for Pavement Marking Removal.

## **FINE AGGREGATE (FA-6)**

### **Description**

This item of work shall consist of providing and applying to the freshly laid sealant a dusting coat of Fine Aggregate (FA-6) where directed by the Engineer to prevent tracking.

The Contractor shall be responsible for sweeping and cleaning streets to make sure the street surface is in an acceptable condition after crack filling. All loose fine aggregates shall be removed from the pavement surface by means of mechanical sweepers or hand broom within 72 hours. Removal and sweeping operations shall be included in the cost of FINE AGGREGATE (FA-6).

### **Basis of Payment**

Sanding of the sealant will be paid for at the contract unit price per TON applied for "FINE AGGREGATE (FA-6).

## **MICRO-SURFACING**

### **Description**

This item shall meet the requirements of the BDE Special Provision for Preventive Maintenance – Micro-surfacing Effective: January 1, 2009, revised April 1, 2016 (a copy is attached). Prior to applying the mixture, the Contractor shall clean and fill the pavement cracks and voids, which are paid for separately.

Micro-Surfacing material shall be placed at locations shown on the attached listing sheets and location maps.

During construction, it is important to maintain the mixture consistent rendering a finished product that is uniform in color and composition.

The Contractor must provide a neat, straight line edge along the toe of the curb and at the Micro-Surfacing limits.

The Contractor shall protect manhole covers and other structure frames and lids from being coated.

### **Material Inspection and Testing**

A Contractor provided laboratory shall develop the Job Mix Formula (JMF) for the micro-surfacing mixture, shall verify the functioning of the set regulating additives, and shall present certified test results for the Engineer's approval. This laboratory shall be recognized by the International Slurry Surfacing Association as being capable of performing mix designs. The Engineer will verify that the laboratory tests required in ISSA A143 have been conducted.

The Contractor shall provide the Engineer with letters of certification from each supplier that all materials used in the project comply with the Standard Specifications and Special Provisions indicated. Final payment will not be made until all letters of certification have been received.

### **Method of Measurement**

Micro-surfacing 1 Pass and Micro-surfacing 2 Passes will be measured as follows:

- Width: in Lineal Feet and Tenths, edge to edge of paved area
- Length: the limits will be measured in the field in relation to property lines and converted to the total length based on 3 inch aerial photographs from Village of Oak Park database.
- All additional areas, i.e. around curb radii, will be measured in the field separately.

### **Basis of Payment**

This work will be paid for at the contract unit price per SQUARE YARDS for MICROSURFACING, 1 PASS, TYPE II, 20 LB/SQ YD. or MICROSURFACING 2 PASSES, totaling 30 LB/SQ YD which price shall be considered as full compensation for all labor, equipment, and materials to complete the described work.

When a bituminous tack coat is required, it will be paid for separately.

#### **BITUMINOUS MATERIAL (TACK COAT)**

Where specified on the plans, prime coat will be applied prior to micro-surfacing. All material and equipment used in application of BITUMINOUS MATERIAL TACK COAT shall conform to Article 406 of the Specifications.

#### **Basis of Payment**

This work will be paid for at the contract unit price per POUND of residual asphalt BITUMINOUS MATERIAL (TACK COAT), which price shall be considered as full compensation for all labor, equipment, and materials to complete the described work.



# Illinois Department of Transportation

## Memorandum

---

To: All Regional Engineers  
From: Maureen M. Addis  
Subject: Special Provision for Preventive Maintenance –  
Micro-Surfacing  
Date: April 15, 2016

---

A handwritten signature in black ink, reading "Maureen M. Addis".

This special provision was developed by the Bureau of Materials and Physical Research to:

- clarify crushed aggregate requirement,
- add polyester fibers to Jobsite-Mixed Sealant, and
- revise tack coat application rate to reflect residual asphalt.

This special provision should be inserted into preventive maintenance – micro-surfacing contracts and should be used in lieu of Check Sheet #30 Preventive Maintenance – Micro-Surfacing.

The districts should include the BDE Check Sheet marked with the applicable special provisions for the July 29, 2016 and subsequent lettings. The Project Development and Implementation Section will include a copy in the contract.

This special provision will be available on the transfer directory April 15, 2016.

80374m



## PREVENTIVE MAINTENANCE – MICRO-SURFACING (BDE)

Effective: January 1, 2009

Revised: July 1, 2016

Description. This work shall consist of micro-surfacing hot-mix asphalt (HMA) surfaces.

Materials. Materials shall be according to the following.

- (a) Micro-Surfacing. Materials shall be according to the following Articles/Sections of the Standard Specifications.

Item	Article/Section
(1) Mineral Filler (Note 1) .....	1001
(2) Water .....	1002
(3) Coarse Aggregate (Note 2) .....	1004.03
(4) Bituminous Material (Tack Coat) .....	1032.06
(5) Latex-Modified Emulsified Asphalt (Note 3)	
(6) Additives (Note 4)	

Note 1. The mineral filler shall be Type 1 portland cement.

Note 2. The coarse aggregate material shall be selected from the table in Article 1004.03(a) of the Standard Specifications based upon the friction aggregate mixture specified. The quality of the aggregate shall be Class B and the gradation shall be as shown in the table below.

Sieve Size	Type II % Passing	Type III % Passing <sup>1/</sup>
3/8 in. (9.5 mm)	100	100
#4 (4.75 mm)	95 ± 5	80 ± 10
#8 (2.36 mm)	77 ± 13	57 ± 13
#16 (1.18 mm)	57 ± 13	39 ± 11
#30 (600 µm)	35 ± 10	26 ± 8
#50 (300 µm)	19 ± 6	18 ± 7
#100 (150 µm)	15 ± 6	12 ± 6
#200 (75 µm)	10 ± 5	10 ± 5

- 1/ Rut filling mixes shall be constructed using a Type III gradation. All surface mixes shall be constructed using a Type II gradation.

When coarse aggregate is used, it shall be crushed gravel, crushed stone, crushed slag, crushed sandstone, or crushed steel slag. The blending, alternate use, and /or substitutions of aggregates from different sources for use in this work will not be permitted without the approval of the Engineer. Any blending shall be by interlocked

mechanical feeders. The blending shall be uniform, compatible with the other components of the mix, and the equipment shall be approved by the Engineer.

If blending aggregates, the blend shall have a washed gradation performed every other day or a minimum of three tests per week. Testing shall be completed before the aggregate receives final acceptance for use in the mix.

Aggregates shall be screened at the stockpile prior to delivery to the paving machine to remove oversized material or contaminants.

Note 3. CSS-1h Latex Modified Emulsified Asphalt. The emulsified asphalt shall be a quick-traffic latex modified asphalt emulsion containing a minimum of 3.0 percent latex solids by weight of asphalt binder. The latex shall be milled or blended into the emulsifier solution prior to the emulsification process. The CSS-1h latex modified emulsified asphalt shall be according to the following.

Test (AASHTO T 59)	Result
Viscosity, Saybolt Furol, 77 °F (25 °C), SFS	20-100
Storage Stability Test, 24 hours, %	1 max.
Particle Charge Test	Positive
Sieve Test, No. 20 (850 µm), retained on sieve, %	0.10 max.
Distillation Test, Residue from distillation test to 347 ± 9 °F (175 ± 5 °C), %	62 min.

Tests on residue from distillation	Result
Penetration, 77 °F (25 °C), 100 grams, 5 seconds, (AASHTO T 49), dmm	40-90
Ductility, 77 °F (25 °C), 50 mm/min, (AASHTO T 51), mm	400 min.
Solubility in trichloroethylene, (AASHTO T 44), %	97.5 min.
Softening Point, (AASHTO T 53), °F (°C)	135 (57) min.
Absolute Viscosity, 140 °F (60 °C), (AASHTO T 202), Poises (Pa · sec)	8,000 (800) min.

Note 4. Additives may be added to the emulsion mix or any of the component materials to provide the control of the quick-traffic properties. They shall be included as part of the mix design and be compatible with the other components of the mix.

(b) Crack/Joint Sealant. The crack/joint sealant shall be a fiber-modified asphalt binder mixed at the jobsite or premixed.

(1) Jobsite-Mixed Sealant. The sealant shall consist of an asphalt binder and fibers, and be according to the following.

- a. Asphalt Binder. The asphalt binder shall be PG 58-28, PG 58-22, or PG 64-22 and meet the requirements of Article 1032.05 of the Standard Specifications.
- b. Fibers. Fibers shall be short cut polypropylene or polyester fibers meeting the properties listed below. The fiber will be accepted by certification. The Contractor shall supply a certification from the manufacturer stating that it meets the specified requirements.

Property	Value	
	Polypropylene	Polyester
Length, in. (mm)	0.3 - 0.5 (8 - 12)	0.25 ± 0.02 (6.3 ± 0.5)
Denier	13 - 16	3 - 6
Crimps	None	None
Tensile Strength, min., psi (kPa)	40,000 (275,000)	70,000 (482,000)
Specific Gravity (typical)	0.91	1.32 - 1.40
Moisture Regain @ 70 °F (21 °C) and 65% RH (typical), %	0.1	N/A
Elongation at Break, %		35 - 38
Melt Temperature, °F, °C		475 - 490 (246 - 254)
Percent Fibers by weight (mass)	8.0	5.0 ± 0.5

- c. Sealant Heating. The sealant shall be heated in the kettle at temperatures between 255 and 285 °F (124 and 141 °C).
- (2) Premixed Sealant. The sealant shall be packaged and consist of an asphalt binder, fibers, and other modifiers meeting the following requirements. The sealant and its components will be accepted by certification. The Contractor shall submit a certification from the manufacturer stating that it meets the specified requirements.
- a. Asphalt Binder. The asphalt binder shall be PG 64-22 and meet the requirements of Article 1032.05 of the Standard Specifications.
  - b. Fibers. Fibers shall be short cut polyester fibers meeting the properties listed in the table above for Jobsite-Mixed Sealant.

The sealant, in its final form, shall meet the following requirements when sampled and heated to the manufacturer's recommended maximum heating temperature according to ASTM D 5167.

Test	Value
Cone Penetration @ 77 °F (25 °C), ASTM D 5329	10-35 dmm

Softening Point, ASTM D 36	175 °F (79 °C) min.
Maximum Heating Temperature	400°F (204 °C)
Application Temperature	350°F (177 °C) min.

**Equipment.** Equipment shall be according to the following.

(a) Micro-Surfacing. Equipment shall be according to the following.

- (1) Micro-Surfacing Mixing Machine. The machine shall be either a continuous (self-loading) machine or a non-continuous (self-contained) machine depending on the size of the project as described below. Both types of machines shall have sufficient storage capacity for aggregate, emulsified asphalt, mineral filler, control additive and water to maintain an adequate supply to the proportioning controls. The mixing unit shall be able to accurately deliver and proportion the aggregate, emulsified asphalt, mineral filler, control setting additive, and water to a revolving multi-blade, double-shafted mixer.

Machines that are the continuous (self-loading) type shall be an automatic-sequenced, self-propelled, continuous-flow mixing unit able to discharge the mixed product on a continuous-flow basis. The machine shall be equipped to allow the operator to have full control of the forward and reverse speeds during applications of the material and be equipped with opposite-side driver stations to assist in alignment.

Non-continuous (self-contained) machines will be allowed on projects with a length of 2 lane-miles (3.2 lane-km) or less. For mainline paving, the Contractor shall have at least three self-contained machines in continuous operation to ensure appropriate production rates. Self-contained machines will also be allowed on shoulders, ramps, short applications such as bridge decks, or where the material can be placed in a single loading capacity of the machine.

Each mixing unit to be used in the performance of the work shall be calibrated in the presence of the Engineer prior to construction. Each new or different aggregate requires a new calibration. Previous calibration documentation covering the exact materials to be used may be acceptable, provided that no more than 30 days have lapsed. The documentation shall include an individual calibration of each material at various settings, which can be related to the machine metering devices. Prior to the calibration process, portable scales used to calibrate the mixing machine for emulsion and aggregate shall be checked with 25 lb and 50 lb weights, respectively. Results from the standard weight checks shall be furnished to the Engineer. No machine will be allowed to work on the project until the calibration has been completed and/or accepted.

- (2) Micro-Surfacing Spreader. The mixture shall be agitated and spread uniformly in the surfacing box by means of twin shafted paddles or spiral augers fixed in the spreader box. A front seal shall be provided to insure no loss of the mixture at the road contact point. The rear seal shall act as a final strike-off and shall be adjustable.

The spreader box and rear strike-off shall be so designed and operated that a uniform consistency is achieved to produce a free flow of material to the rear strike-off. The spreader box shall have suitable means provided to side shift the box to compensate for variations in the pavement geometry.

A secondary strike-off shall be provided to improve surface texture on the surface course. The secondary strike-off shall have the same adjustments as the spreader box and shall not bounce, wobble, or chatter.

When required on the plans, before the final surface course is placed, preliminary micro-surfacing material may be required to fill ruts, utility cuts, depressions in the existing surface, etc. Ruts of 1/2 in. (13 mm) or greater in depth shall be filled independently with a rut-filling spreader box, either 5 or 6 ft (1.5 or 1.8 m) in width. For irregular or shallow rutting of less than 1/2 in. (13 mm) in depth, a full-width scratch-coat pass may be used as directed by the Engineer utilizing either a stiff primary rubber or else a metal primary strike off. Ruts that are in excess of 1 1/2 in. (38 mm) in depth may require multiple placements with the rut-filling spreader box to restore the cross-section. All rut-filling level-up material should cure under traffic for a minimum of 24 hours before additional material is placed on top of the level up.

- (3) Micro-Surfacing Proportioning Devices. Individual volume or weight controls for proportioning each material to be added to the mix (i.e. aggregate, mineral filler, emulsified asphalt, additive, and water) shall be provided and properly marked. These proportioning devices are used in material calibration and determining the material output at any time. Calibration records, conversion formulas, and daily run sheets including the beginning and final numbers shown on the proportioning devices shall be submitted to the Engineer for approval. During production any deviations from the original JMF shall be approved by the Engineer.

(b) Crack/Joint Sealing. Equipment shall be according to the following.

- (1) Air Compressor. The air compressor shall be capable of producing a minimum pressure of 90 psi (620 kPa) at the end of the discharge hose. The air stream shall discharge onto the pavement through an appropriate air lance. The tool lubricator shall be bypassed and a filter installed on the discharge valve to keep water and oil out of the line.
- (2) Oil Kettle. The crack sealant shall be heated in an oil jacketed double wall kettle equipped with an agitator (reversing rotary auger action) and separate thermometers for the oil bath and mixing chamber. The unit shall also be equipped with a reversible hydraulic 2 in. (50 mm) hot asphalt pump and a recirculating pump to circulate the oil bath.

## CONSTRUCTION REQUIREMENTS

**General.** The paving mixture shall be capable of filling up to 1 1/2 in. (38 mm) wheel ruts in one pass, be capable of field regulation of the setting time, and be suitable for nighttime placement. The compatibility of all ingredients of the mix, including the mix set additive, shall be certified by the emulsified asphalt manufacturer.

**Weather Limitations.** Placement of the micro-surfacing shall be done between May 1 and October 15, and when the temperature is at least 50 °F (10 °C) and rising and the forecast for the next 24 hours is above 40 °F (5 °C).

**Mix Design.** A Contractor provided laboratory shall develop the mix design for the micro-surfacing mixture, shall verify the functioning of the set regulating additives, and shall present certified test results for the Engineer's approval. This laboratory shall be recognized by the International Slurry Surfacing Association (ISSA) as being capable of performing mix designs. The Engineer will verify the laboratory tests required in ISSA A143 have been conducted.

Proportions for the mix design shall be within the following limits.

Mineral Aggregate, dry weight (mass) lb/sq yd (kg/sq m)	15-50 (8-30)
Latex Emulsified Asphalt Residue, % by wt. of Aggregate	5.5-10.5
Latex Base Modifier	As required with % by weight (mass) of binder, min. of 3.0
Mix Set Additive	As required
Mineral Filler, % by weight (mass) of Aggregate	0.25 - 3 depending on weather conditions

The amount of mineral filler needed shall be determined by the laboratory mix design and will be considered as part of the aggregate gradation.

The amount and type of latex shall be determined by the laboratory performing the mix design. The minimum amount required shall be based on asphalt weight content and shall be certified by the emulsion supplier.

Compatibility of the aggregate, latex-modified emulsified asphalt, mineral filler, and other additives shall be verified by the mix design. The materials shall meet the following requirements for ISSA A143.

ISSA Test No.	Description	Specification
ISSA TB-139	Wet Cohesion @ 30 minutes min. (Set) @ 60 minutes min. (Traffic)	12 kg-cm min. 20 kg-cm min. or Near Spin
ISSA TB-109	Excess Asphalt by LWT Sand Adhesion	50 gm/sq ft (538 gm/sq m) max.
ISSA TB-114	Wet Stripping	Pass (90% min.)
ISSA TB-100	Wet-Track Abrasion Loss One-hour Soak Six-day Soak	50 gm/sq ft (538 gm/sq m) max. 75 gm/sq ft (807 gm/sq m) max.

ISSA TB-147	Lateral Displacement	5% max.
	Specific Gravity after 1,000 Cycles of 25 lb (11.34 kg)	2.10 max.
ISSA TB-144	Classification Compatibility	11 Grade Points min. (AAA, BAA)
ISSA TB-113	Mix Time @ 77 °F (25 °C)	Controllable to 120 seconds min.

The mixing test and set-time test shall be checked at the highest temperatures expected during construction.

The mix design shall report the quantitative effects of moisture content on the unit weight of the aggregate (bulking effect). The report shall clearly show the proportions of aggregate, mineral filler (minimum and maximum), water (minimum and maximum), additive usage, and latex-modified asphalt emulsion based on the dry weight of the aggregate.

For the aggregate blend in the mix design, test results for AASHTO T 176 shall be provided with the mix information to the Engineer. Aggregate test values below 65 shall require review and approval from the Engineer.

Before the work commences, the Contractor shall submit to the Engineer a complete mix design covering the specific materials to be used on the project. The percentages of each individual material required shall be shown in the laboratory report. The Engineer shall approve the mix design prior to its use. After approval, no substitutions will be permitted, unless approved by the Engineer, and the Contractor shall maintain continuous control of the latex-modified emulsified asphalt to dry aggregate proportioning to conform to the approved mix design within a tolerance of  $\pm 2$  gal/ton ( $\pm 8$  L/metric ton).

Test Strip. For projects over 100,000 sq yd (83,600 sq m), at least one day prior to starting the project the Contractor shall designate a mutually agreeable location and apply a test strip of micro-surfacing using the aggregate indicated in the mix design. The Engineer will evaluate the micro-surfacing application rate and cure time.

Surface Preparation. Pavement markings shall be removed according to Article 783.03(a) of the Standard Specifications. Only very small particles of tightly adhering existing markings may remain in place.

When specified in the plans, pavement markers shall be removed according to Article 783.03(b) of the Standard Specifications.

Bumps greater than or equal to 1/2 in. (13 mm) shall be removed by grinding. The Contractor shall determine bump grinding locations in the presence of the Engineer by using a 16-ft (5-m) straightedge with the scratcher bolts set to 1/2 in. (13 mm). All locations marked by the scratcher bolts shall be ground using either a grinding machine consisting of multiple saws or a cold-milling machine with a double- or triple-wrap milling head.

Joints and cracks 3/16 in. (5 mm) or wider shall be cleaned of loose and unsound material and sealed. The sealant shall be applied only when the joints and cracks are clean and dry, and the

ambient temperature is 40-85 °F (4-29 °C). The sealant shall be applied using a pressurized wand delivery system with such devices as necessary to seal the cracks/joints and form a nominal 0.125 in. (3 mm) thick by 3 in. (75 mm) wide overseal band centered so that the center of the 3 in. (75 mm) wide band is within 1 in. (25 mm) of the crack. The sealant shall be allowed to cure before opening to traffic. When approved by the Engineer, the sealant may be dusted with fine sand, portland cement, or mineral filler to prevent tracking.

Micro-Surfacing. The micro-surfacing shall be applied as shown on the plans and the following.

- (a) Preparation. Prior to applying the micro-surfacing, the pavement surface shall be cleaned. On highly oxidized surfaces, a tack coat shall be applied at a rate of 0.025 lb/sq ft (0.122 kg/sq m) according to Article 406.05(b) of the Standard Specifications. Manholes, valve boxes, drop inlets, and other service entrances shall be protected from the micro-surfacing by a suitable method. The surface preparation shall be approved by the Engineer prior to the application of the micro-surfacing. No dry aggregate either spilled from the lay-down machine or existing on the road will be permitted.

The Contractor shall apply the micro-surfacing according to the following methods.

- (1) Micro-Surfacing Rut Filling. This method shall consist of filling each of the two wheelpath ruts in a lane using the specially designed rutbox and the rutfill (Type III) mix. It shall be the Contractor's responsibility to determine and estimate the quantities of rutfill mix required for rut filling. This work is then followed by one pass of micro-surfacing as described below.
- (2) Micro-Surfacing, Single Pass. This method shall consist of applying the surface mix over the entire width of each lane in one pass at an application rate of 20 lb/sq yd (11 kg/sq m).

Determinations of application rates shall be from daily readings taken from the material control devices during the progress of the work.

The pavement surface shall be prewetted by water fogging ahead of the spreader box when road conditions require, as determined by the Engineer. The rate of fogging shall be adjusted during the day based on pavement temperature, surface texture, and dryness.

The paving mixture shall be spread to fill minor cracks and shallow potholes and leave a uniform surface. Care shall be taken when rut filling to restore the designed profile of the pavement cross section. Excess crowning (over-filling) of rut areas shall be avoided. A sufficient amount of material shall be carried at all times in all parts of the spreader box to ensure complete coverage. Overloading of the spreader shall be avoided. No lumps or uncoated aggregate will be permitted in the finished surface.



Adjustments to the mix design may be required during construction, based on field conditions. The percent of mineral filler in the mix design may be increased or decreased by less than 0.3 percent when the slurry seal is being placed if it is found to be necessary for better consistency or set times. The Engineer will give final approval for all adjustments.

- (b) **Mix Consistency.** The finished product shall be uniform in color and composition. No streaks, such as those caused by oversized aggregate, shall be left in the finished surface. If excess streaking develops, the job will be stopped until the Contractor proves to the Engineer that the situation has been corrected. Excessive streaking is defined as more than four drag marks greater than 1/2 in. (13 mm) wide and 4 in. (100 mm) long, or 1 in. (25 mm) wide and 3 in. (75 mm) long, in any 30 sq yd (25 sq m) area. No transverse ripples or longitudinal streaks of 0.25 in. (6 mm) in depth will be permitted, when measured by placing a 10 ft (3 m) straightedge over the surface.
- (c) **Mix Stability.** The micro-surfacing shall possess sufficient stability so that premature breaking of the material in the spreader box does not occur. The mixture shall be homogeneous during and following mixing and spreading. It shall be free of excess water or emulsified asphalt and free of segregation of the emulsified asphalt and aggregate fines from the coarser aggregate. Under no circumstances shall water be sprayed directly into the lay-down box while placing micro-surfacing material.
- (d) **Joints and Edges.** The Contractor shall devise a joint plan according to ISSA A143 and submit to the Engineer for approval. When practical, the surface course joint shall be at least 10 in. (255 mm) away from the nearest edge of any subsequent permanent pavement markings.

Micro-surfacing edges shall be parallel with the existing pavement edges. If the existing pavement edge cannot be used to give a straight edge, a stringline or other guide will be required. Edge lines shall not vary by more than  $\pm 2$  in. (50 mm) horizontally in any 100 ft (30 m) of length.

A smooth, neat seam shall be provided where two passes meet. Excess material shall be immediately removed from the ends of each run. Any damage to, or irregularities in, the micro-surfacing shall be repaired, as directed by the Engineer. All repairs shall be made with a paver box, except areas designated as hand work areas.

- (e) **Hand Work.** Those areas inaccessible to the spreader box and approved by the Engineer shall be designated as hand work areas. Adjustments to the additive will be permitted to provide a slower setting time when hand spreading is needed. If hand spreading is necessary, the mixture shall be poured in a small windrow along one edge of the surface to be covered and then spread uniformly by a hand squeegee or lute. Hand work areas shall have an appearance consistent with that being placed with a spreader box.

Clean-Up. All areas, such as manholes, gutters, and intersections, shall have the micro-surfacing mix removed as specified by the Engineer. The Contractor shall, on a daily basis, remove any debris associated with the performance of the work.

Sampling and Testing. The Contractor shall check yield of the application after the first 1000 ft (300 m), and throughout each day's paving, with a minimum of three tests per day. Yield check results shall be furnished to the Engineer daily.

The Contractor shall submit a daily "run sheet" for each day's work as soon as all the data is available. The run sheet shall provide a breakdown of the actual meter numbers and quantities of all materials actually used each day, as well as the respective locations.

Opening to Traffic. The micro-surfacing shall be opened to traffic within one hour of its application.

Curing. The micro-surfacing shall cure for a minimum of 7 days before placement of the permanent pavement markings.

Method of Measurement. This work will be measured for payment as follows.

- (a) Contract Quantities. The requirements for the use of contract quantities shall conform to Article 202.07(a) of the Standard Specifications.
- (b) Measured Quantities. Crack/Joint sealing will be measured for payment in feet (meters), measured along the crack.

Pavement marking removal will be measured for payment according to Article 783.05 of the Standard Specifications.

The micro-surfacing will be measured according to the following for the method of application provided in the plans.

- (1) Micro-Surfacing Rut Filling. Micro-surfacing rut filling will be measured for payment in place in feet (meters) along the wheel path or filled rut.
- (2) Micro-surfacing, Single Pass. Micro-surfacing, single pass will be measured for payment in place and the area computed in square yards (square meters). The width for measurement will be the width of the top surface as shown on the plans or as directed by the Engineer.

PrimeTack coat, when required, will be measured for payment according to Article 406.13(b) of the Standard Specifications.

Basis of Payment. Crack/joint sealing will be paid for at the contract unit price per foot (meter) of FIBER-MODIFIED ASPHALT CRACK SEALING.

Bump removal will be paid for at the contract unit price per each for BUMP REMOVAL.

Pavement marking removal and pavement marker removal will be paid for according to Article 783.06 of the Standard Specifications.

Rut filling will be paid for at the contract unit price per foot (meter) for MICRO-SURFACING RUT FILLING.

Micro-surfacing, single pass will be paid for at the contract unit price per square yard (square meter) for MICRO-SURFACING, SINGLE PASS, of the gradation type and friction aggregate mixture specified.

Tack coat, when required, will be paid for according to Article 406.14 of the Standard Specifications.

80374

# 16-06 MICROSURFACING AND CRACK CLEAN & FILL PROGRAM

## VILLAGES OF OAK PARK AND RIVER FOREST

CF=Crack-fill

PC=Prime coat

MP= Micro-surf

### OAK PARK LOCATIONS:

### MICRO SURFACING

	STREET	FROM	TO	AREA (SQ YD)	REQUIRED	CF (lbs)	PRM (lbs)
1	WOODBINE	BERKSHIRE	GREENFIELD	2030	CF,MP	510	0
2	WOODBINE	GREENFIELD	LEMOYNE	2030	CF,MP	610	0
3	GROVE	LEMOYNE	NORTH AVE.	1916	CF,MP	480	0
4	EUCLID	GREENFIELD	LEMOYNE	1898	CF,PC,MP	380	428
5	EUCLID	LEMOYNE	NORTH AVE	1804	CF,PC,MP	190	406
6	COLUMBIAN	GREENFIELD	LEMOYNE	1711	CF,MP	350	0
7	COLUMBIAN	LEMOYNE	NORTH AVE	1867	CF,MP	380	0
8	LEMOYNE	ROSSELL	RIDGELAND	2053	CF,MP	420	0
9	GREENFIELD	HAYES	AUSTIN	2929	CF,MP	300	0
10	COLUMBIAN	DIVISION	BERKSHIRE	1786	CF,MP	360	0
11	FOREST	AUGUSTA	THOMAS	1958	CF,PC,MP	400	441
12	FOREST	THOMAS	DIVISION	2037	CF,PC,MP	410	459
13	HARVEY	IOWA	AUGUSTA	1991	CF,PC,MP	600	448
14	LOMBARD	CHICAGO	IOWA	1944	CF,PC,MP	200	438
15	SCOVILLE	LAKE	ONTARIO	1851	CF,MP	190	0
16	SCOVILLE	ONTARIO	ERIE	1509	CF,MP	160	0
17	CUYLER	LAKE	ONTARIO	2256	CF,MP	230	0
18	CUYLER	ONTARIO	ERIE	1556	CF,MP	320	0
19	CUYLER	ERIE	SUPERIOR	1556	CF,MP	160	0
20	CUYLER	SUPERIOR	CHICAGO	1524	CF,MP	160	0
21	TAYLOR	LAKE	ONTARIO	2489	CF,MP	750	0
22	MAPLE	RANDOLPH	PLEASANT	2100	CF,MP	420	0
23	PLEASANT	HOME	KENILWORTH	1722	CF,MP	350	0
24	WESLEY	MADISON	WASHINGTON	1524	CF,MP	310	0
25	WESLEY	WASHINGTON	RANDOLPH	1462	CF,MP	300	0
26	WESLEY	RANDOLPH	PLEASANT	1436	CF,MP	440	0
27	WESLEY	PLEASANT	SOUTH BLVD	1742	CF,MP	350	0
28	TAYLOR	ROOSEVELT	FILLMORE	1804	CF,MP	540	0
29	TAYLOR	FILLMORE	HARVARD	1837	CF,MP	370	0
30	EUCLID	HARRISON	VAN BUREN	1772	CF,PC,MP	390	399
31	EUCLID	ADAMS	MADISON	1804	CF,PC,MP	390	406
32	LYMAN	FLOURNOY	HARRISON	1944	CF,PC,MP	370	438
33	HUMPHREY	FLOURNOY	HARRISON	1929	CF,PC,MP	370	435

**VOP MICRO SURFACING 2 PASS**

	STREET	FROM	TO	AREA (SQ YD)	REQUIRED	CF (lbs)	PRM (gal)
35	GREENFIELD	WOODBINE	OAK PARK	3733	CF,MP	750	0
36	ADAMS	RIDGELAND	HIGHLAND	1867	CF,MP	380	0
37	HOME	ROOSEVELT	FILLMORE	1929	CF,MP	390	0
38	HOME	FILLMORE	HARVARD	1804	CF,MP	370	0
39	HARVEY	WASHINGTON	RANDOLPH	1711	CF,MP	350	0
40	ADDITIONAL STR	TBNL	TBNL	3671	CF,MP	370	0

**OAK PARK LOCATIONS: CRACK FILL ONLY**

				lbs	
42	LEMOYNE	HARLEM	OAK PARK	1680	CF
43	DIVISION	HARLEM	FOREST	750	CF
44	HARVEY	VAN BUREN	JACKSON	380	CF
45	GARFIELD	HARLEM	WENONAH	170	CF

**OAK PARK LOCATIONS: CRACK FILL CL AND PATCHES lbs**

47	RIDGELAND	MADISON	SOUTH BLVD	940	CF
48	" "	LEMOYNE	AUGUSTA	360	CF
49	AUGUSTA	OAK PARK	HARLEM	420	CF
50	" "	AUSTIN	HARVEY	140	CF
51	MAPLETON	BERKSHIRE	GREENFIELD	140	CF
52	AUSTIN BLVD *	JACKSON	LEMOYNE	840	CF

\* SOUTH BOUND ONLY

RIVER FOREST LOC		CRACK FILL		lbs
	STREET	FROM	TO	
55	ASHLAND (EAST 1/2)	MADISON	LINDEN	574.9
56	FRANKLIN	MADISON	HAWTHORNE	1,558.3
57	PARK	MADISON	WASHINGTON	729.7
58	FOREST	MADISON	HAWTHORNE	1,497.3
59	KEYSTONE	MADISON	HAWTHORNE	1,636.0
60	GALE	MADISON	HAWTHORNE	1,629.5
61	THATCHER	MADISON	HAWTHORNE	1,780.0
62	PARK DRIVE	PARK	FRANKLIN	337.7
63	CENTRAL	THATCHER	EDGEWOOD	302.6
64	EDGEWOOD	CENTRAL	THATCHER	1,107.3
65	PARK	LAKE	AUGUSTA	2,240.6
66	ASHLAND	LAKE	OAK	921.2
67	MONROE	LAKE	QUICK	487.9
68	THATCHER	CHICAGO	DIVISION	2,679.6
69	KEYSTONE	CHICAGO	DIVISION	1,780.7
70	FOREST	CHICAGO	DIVISION	1,348.7
71	ASHLAND	CHICAGO	DIVISION	1,583.3
72	LATHROP	CHICAGO	DIVISION	1,889.8
73	JACKSON	CHICAGO	DIVISION	1,554.1
74	AUGUSTA	HARLEM	LATHROP	1,621.8
75	IOWA	HARLEM	FRANKLIN	2,226.4

**TOTALS FOR 16-6    MICRO PAVING & CRACK FILL**

---

**FOR VILLAGE OF OAK PARK AND RIVERFOREST**

**TOTALS**

**VILLAGE OF OAK PARK**

MP= MICRO SURFACE	OAK PARK	61771 sy	
MP= MICRO 2 PASS	OAK PARK	14715 sy	
CF= CRACK CLEAN FILL	OAK PARK	20590 lbs	
PC= PRIME COAT	OAK PARK	4298 lbs	
PVMT MARKING L & S		50	sq ft
4" YELLOW		100	Lft
6" WHITE		1699	Lft
12" WHITE		2160	Lft
24" WHITE		990	Lft
PVMT MRK REM.		4044	sq ft
<u>FINE AGGREGATE</u>		<u>12</u>	<u>ton</u>

**VILLAGE OF RIVER FOREST**

MP= MICRO SURFACE	RIVER FOREST	0 sy	
CF= CRACK CLN FILL	RIVER FOREST	29487 lbs	
<u>FINE AGGREGATE</u>		<u>10</u>	<u>ton</u>







2017 River Forest Crackfill List				
STREET NAME	FROM	TO	LBS	ACTION REQUIRED
Ashland (east half)	Madison	Linden	574.9	CF
Franklin	Madison	Hawthorne	1,558.3	CF
Park	Madison	Washington	729.7	CF
Forest	Madison	Hawthorne	1,497.3	CF
Keystone	Madison	Hawthorne	1,636.3	CF
Gale	Madison	Hawthorne	1,629.5	CF
Thatcher	Madison	Hawthorne	1,780.0	CF
Park Drive	Park	Franklin	337.7	CF
Central	Thatcher	Edgewood	302.6	CF
Edgewood	Central	Thatcher	1,107.3	CF
Park	Lake	Augusta	2,240.6	CF
Ashland	Lake	Oak	921.2	CF
Monroe	Lake	Quick	487.9	CF
Thatcher	Chicago	Division	2,679.6	CF
Keystone	Chicago	Division	1,780.7	CF
Forest	Chicago	Division	1,348.7	CF
Ashland	Chicago	Division	1,583.3	CF
Lathrop	Chicago	Division	1,889.8	CF
Jackson	Chicago	Division	1,554.1	CF
Augusta	Harlem	Lathrop	1,621.8	CF
Iowa	Harlem	Franklin	2,226.4	CF



## MICROSURFACING 2017

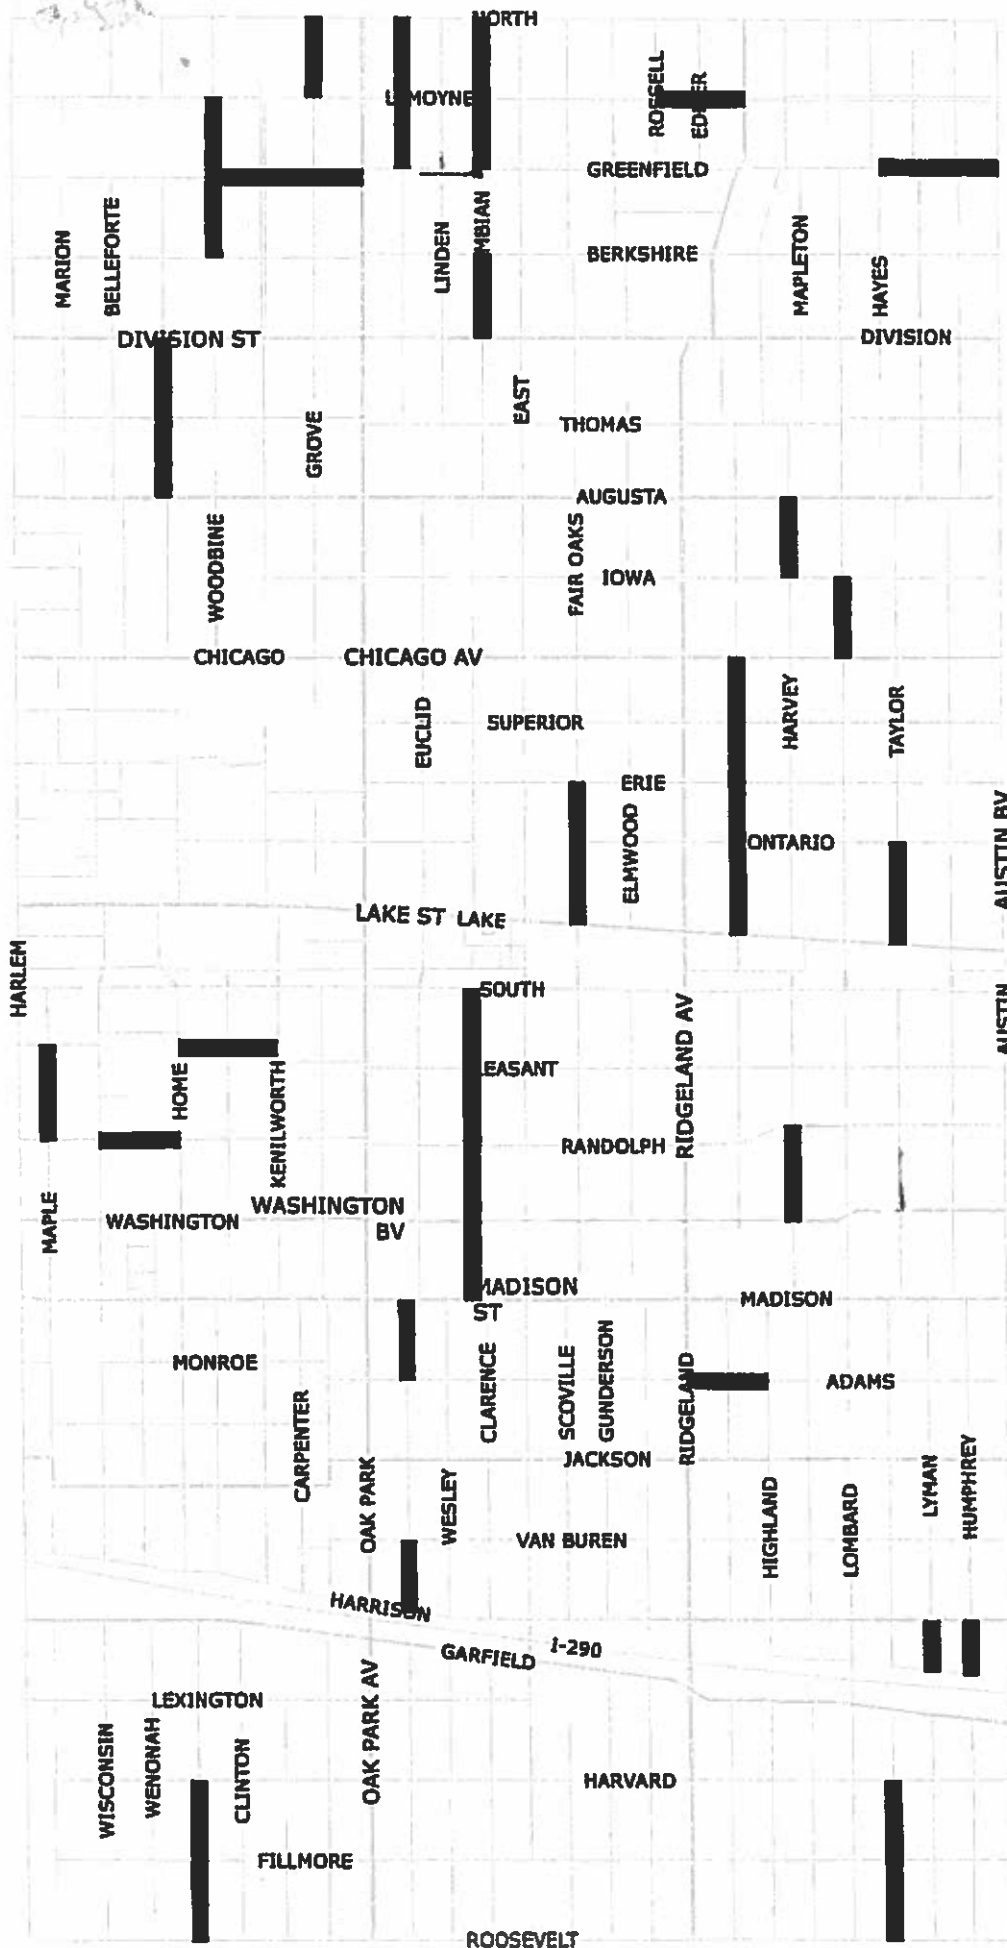

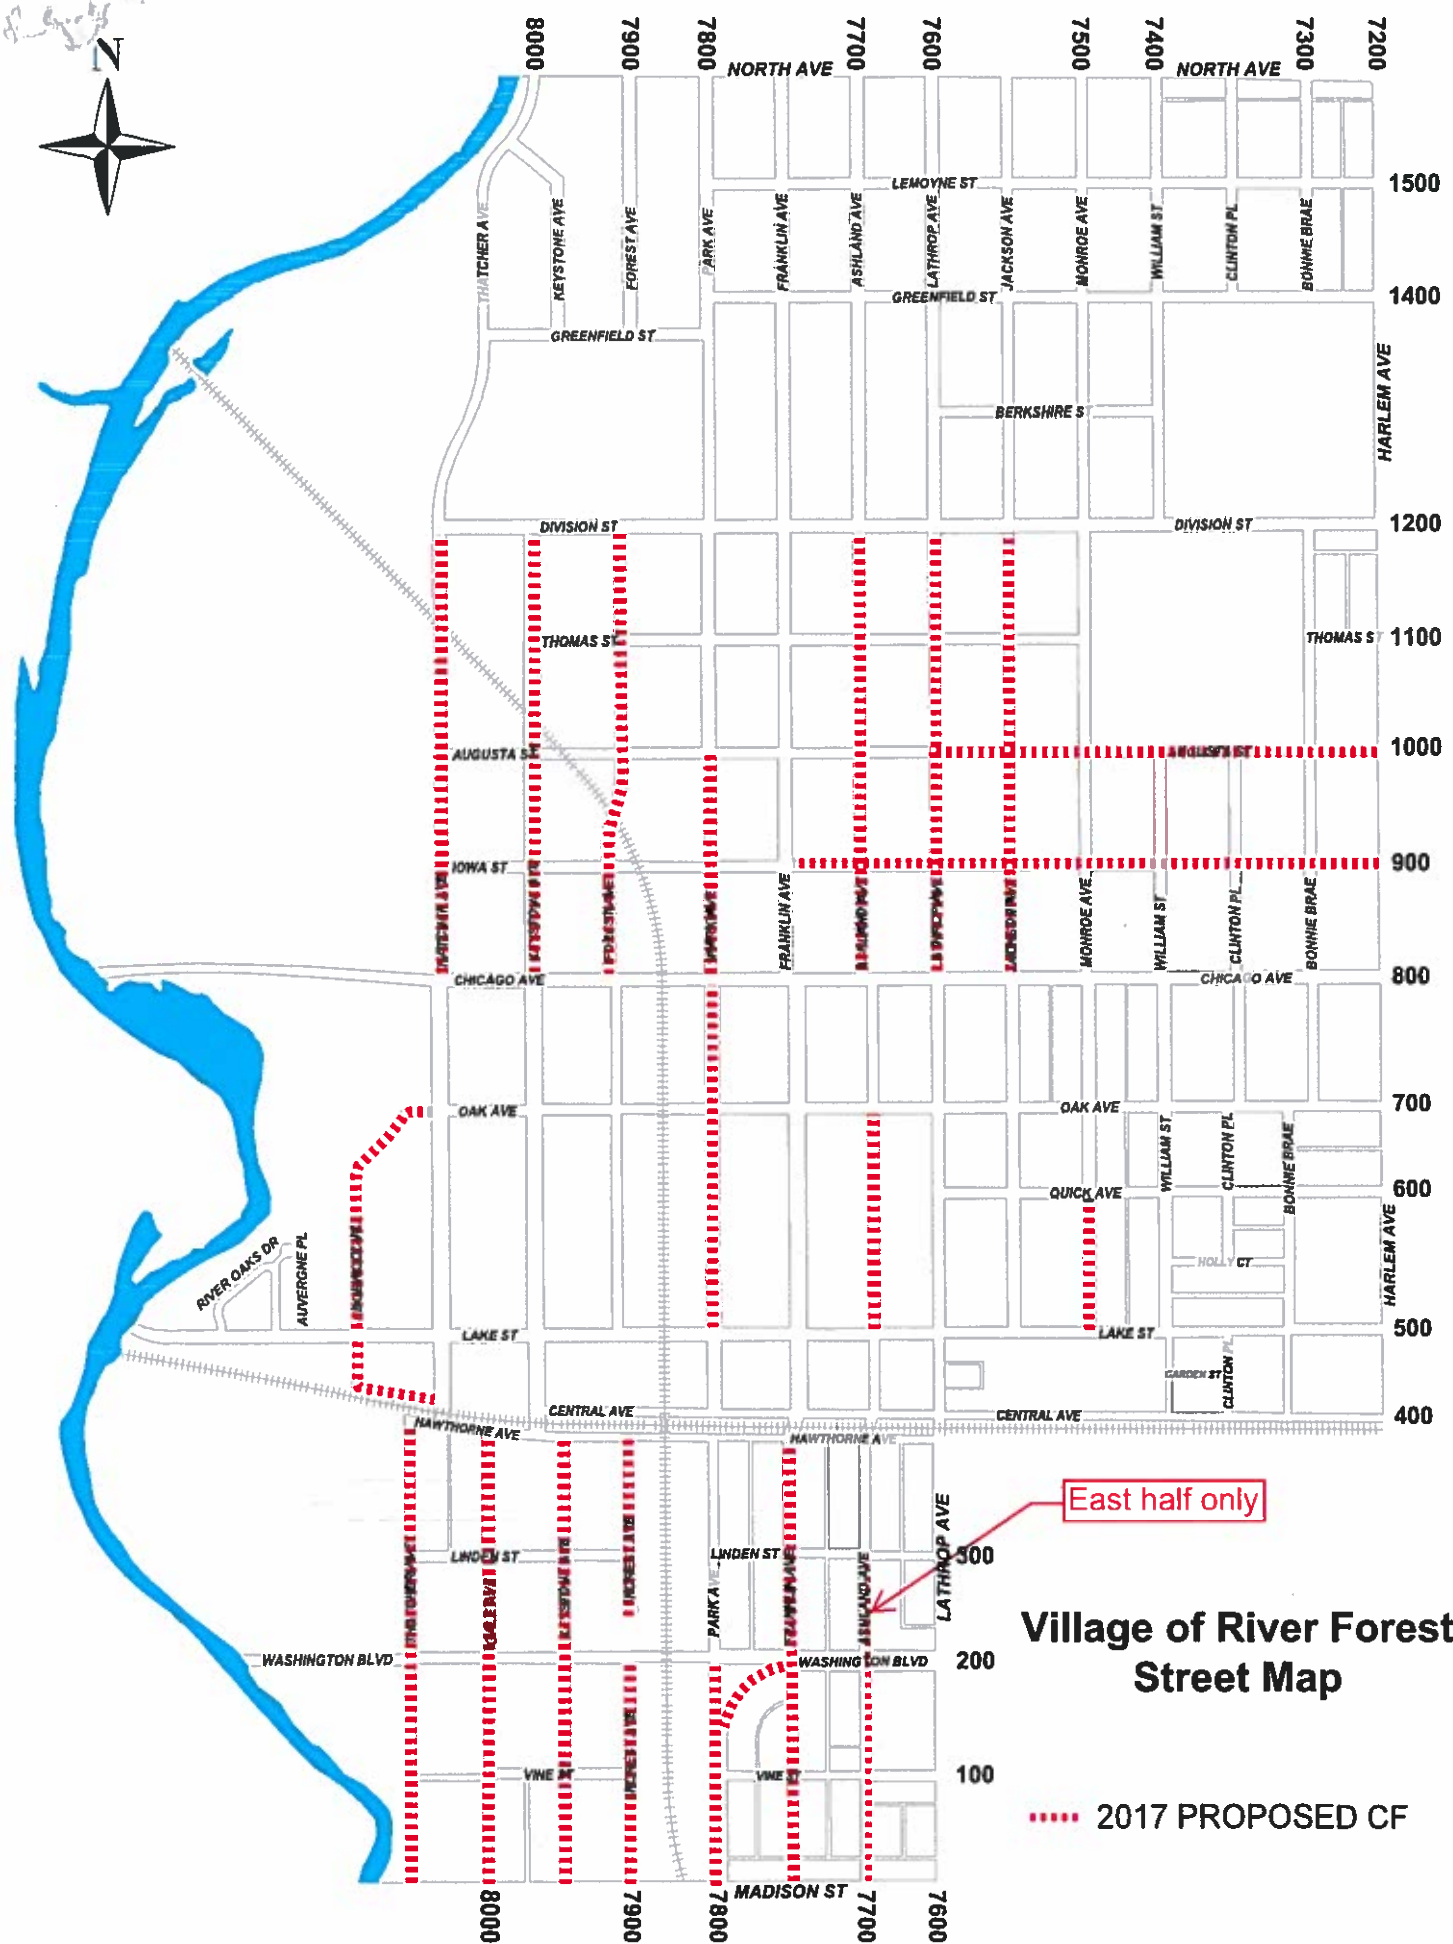

# Village of River Forest Street Map

..... 2017 PROPOSED CF